

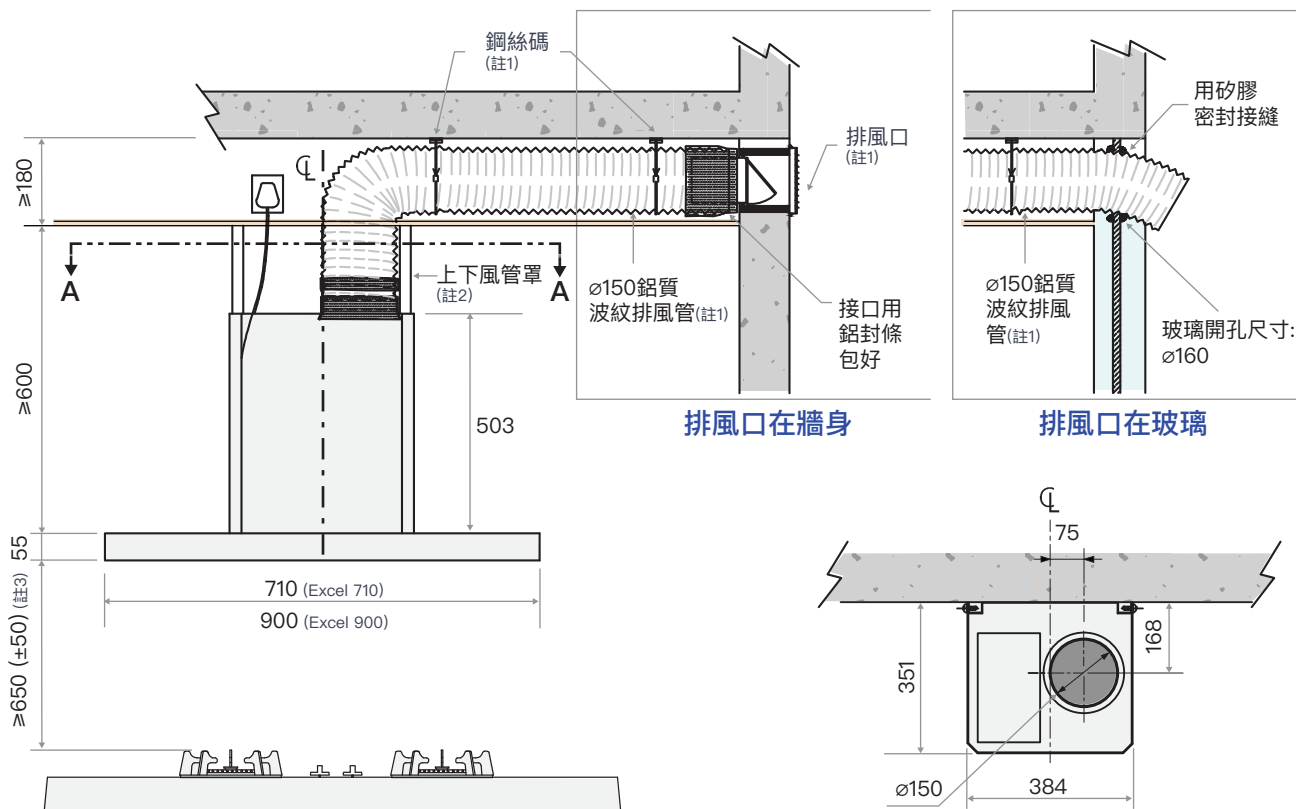




正視圖

A-A 剖視圖



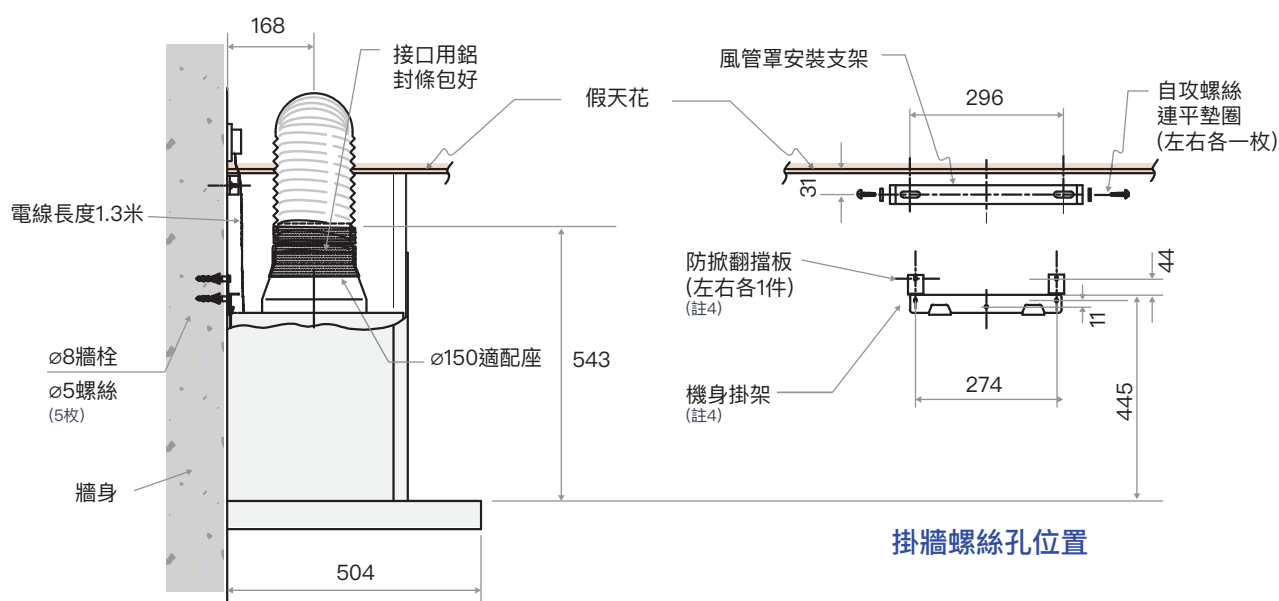


側視圖

掛牆螺絲孔位置

- 註: 1. 由承建商提供及安裝, 需另收費
鋼絲碼距離不可超過1500毫米
2. 上下風管罩可調高度範圍: 503至880毫米
3. 抽油煙機底與煮食爐架距離必須至少為650毫米 (可接受 ± 50 毫米差距)
4. 機身掛架及防掀翻擋板固定在牆身上, 以承托機身重量

EXCEL 710/900 Free-standing Installation

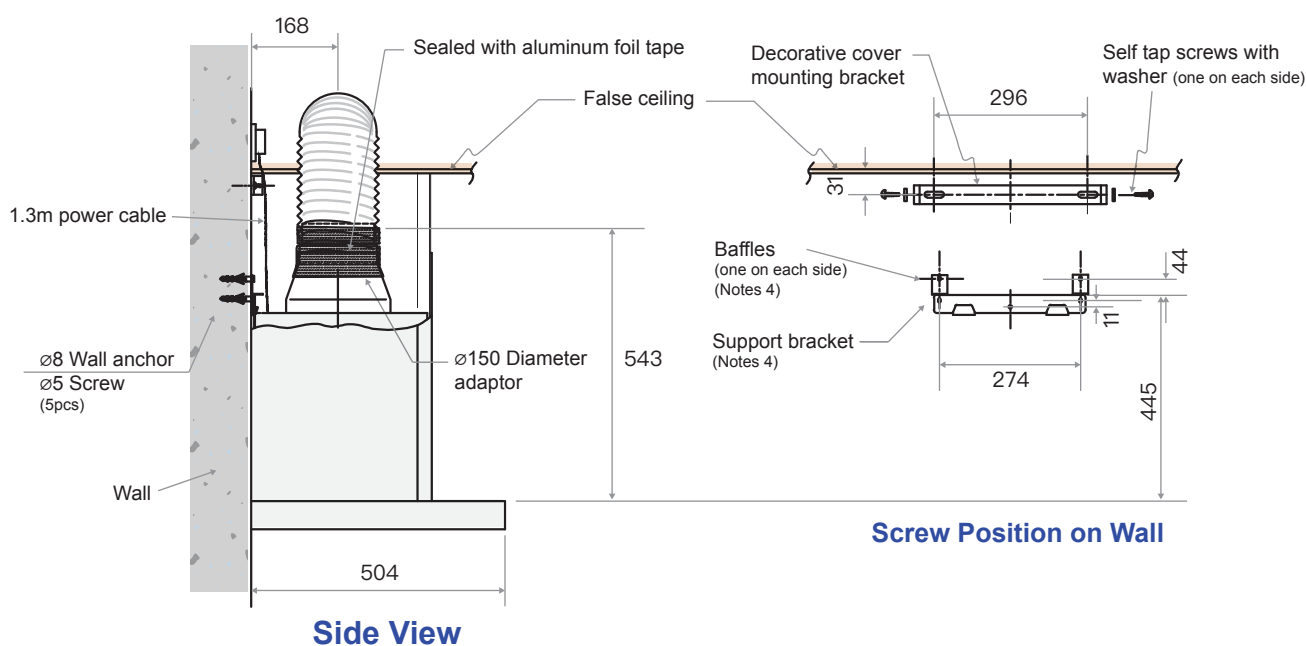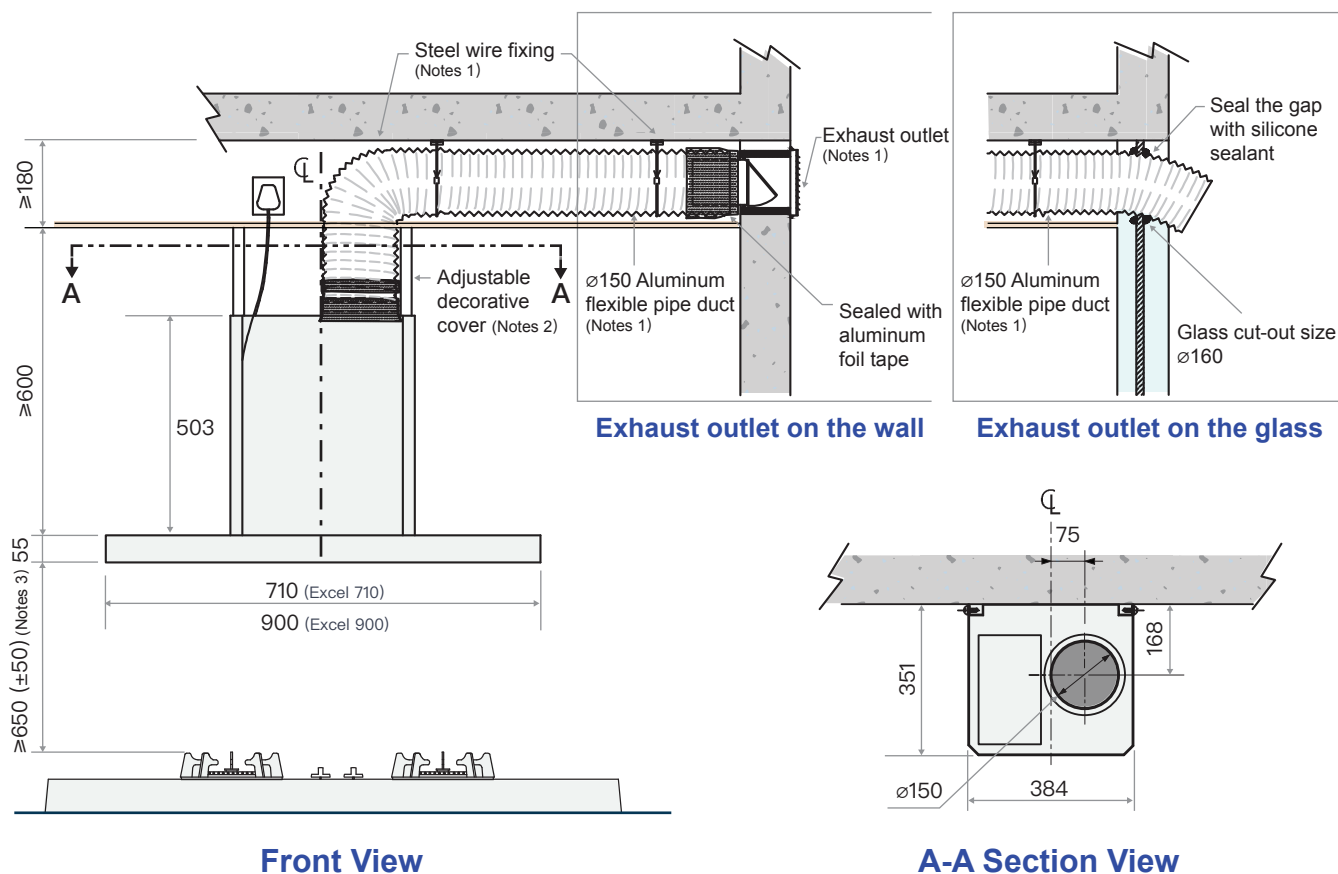

Notes : 1. Provided and installed by contractor with additional charge
The distance between steel wire fixing cannot exceed 1500mm

2. Adjustable height of pipe cover: 503-880mm

3. The distance between the pan support of cooking range and the lowest part of range hood should be at least 650mm (with ± 50 mm tolerance)

4. Support bracket and baffles should be mounted on the wall to support the weight of the appliance