



STR723D 嵌入式安裝



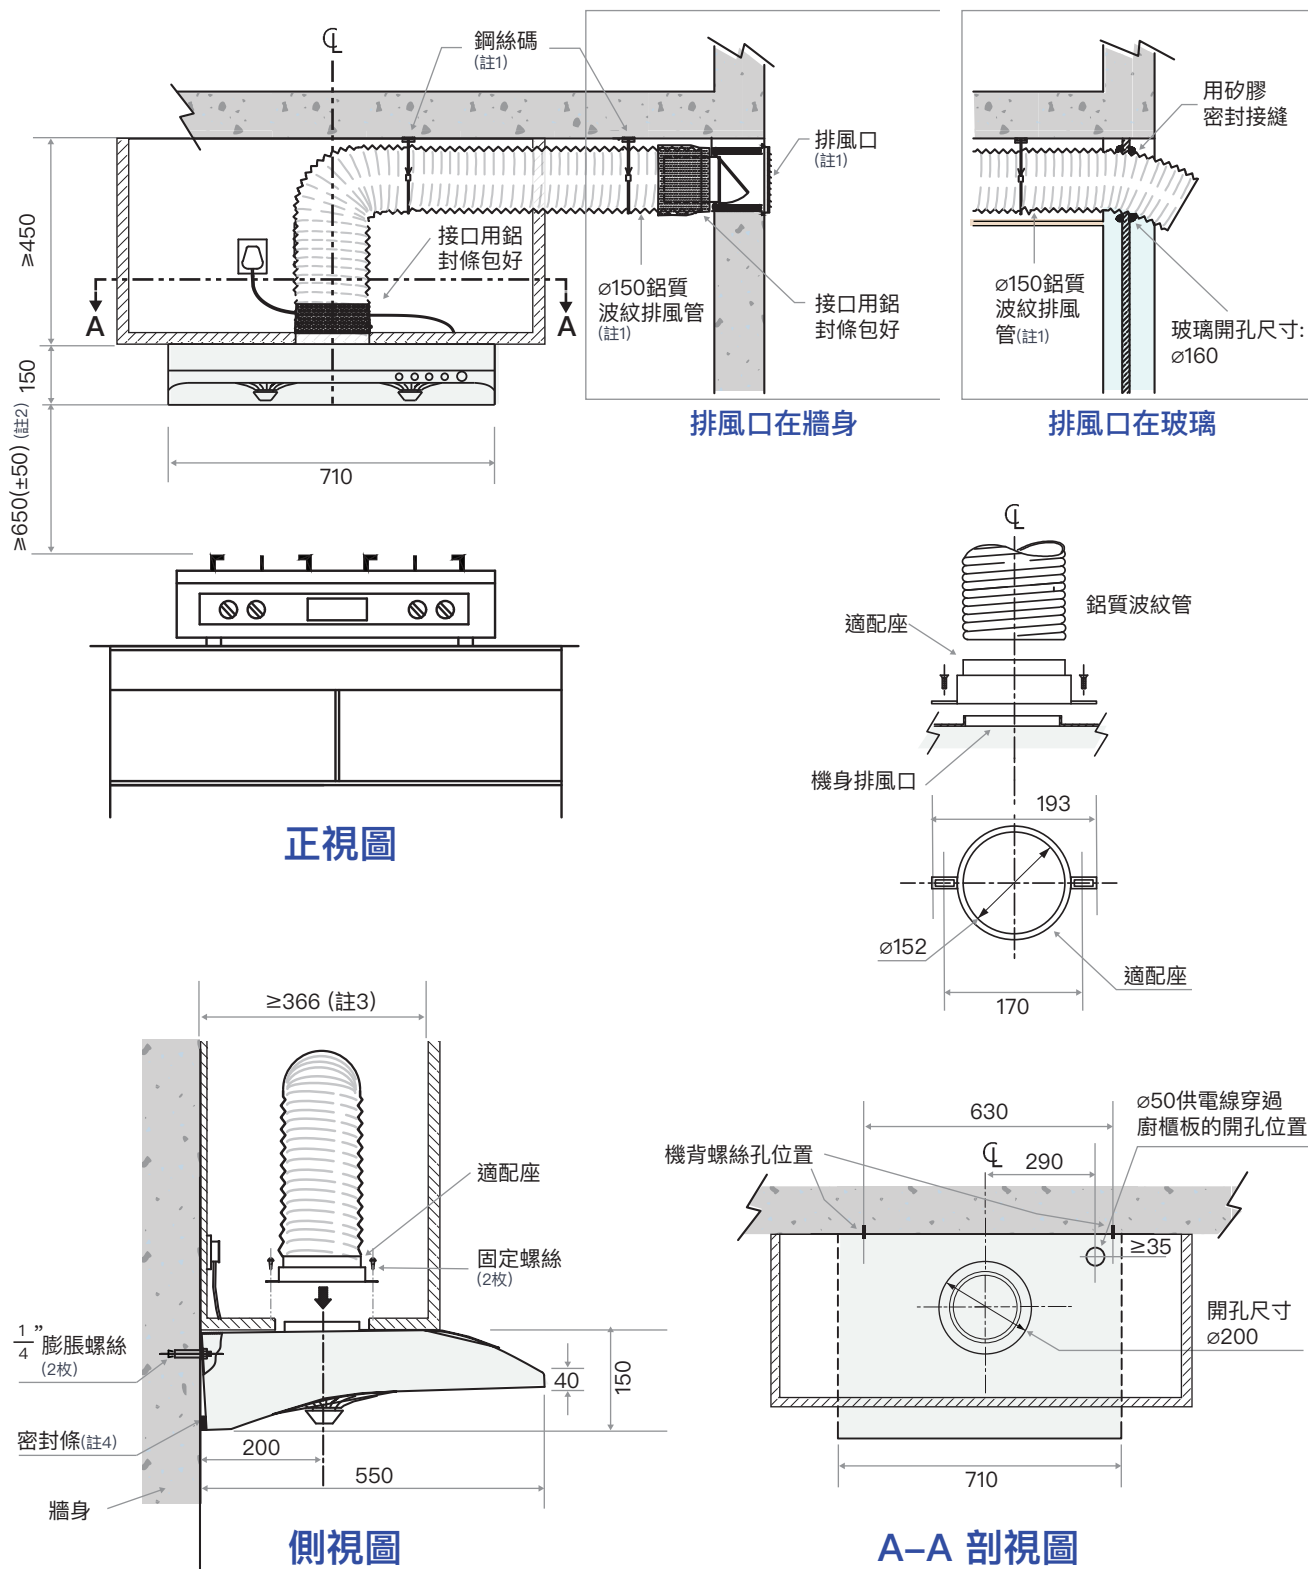


- 註: 1. 由承建商提供及安裝, 需另收費
鋼絲碼距離不可超過1500毫米
2. 抽油煙機底與煮食爐架距離必須至少為650毫米 (可接受±50毫米差距)
3. 廚櫃內部深度不含櫃門厚度不少於366毫米
4. 密封條貼於機背下方邊緣




Rangehood


STR723D Built-in Installation

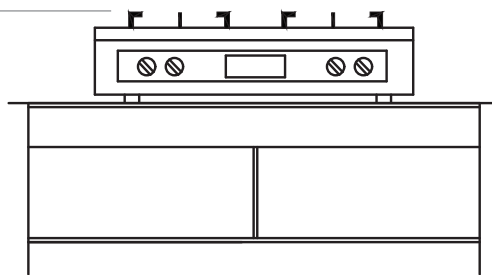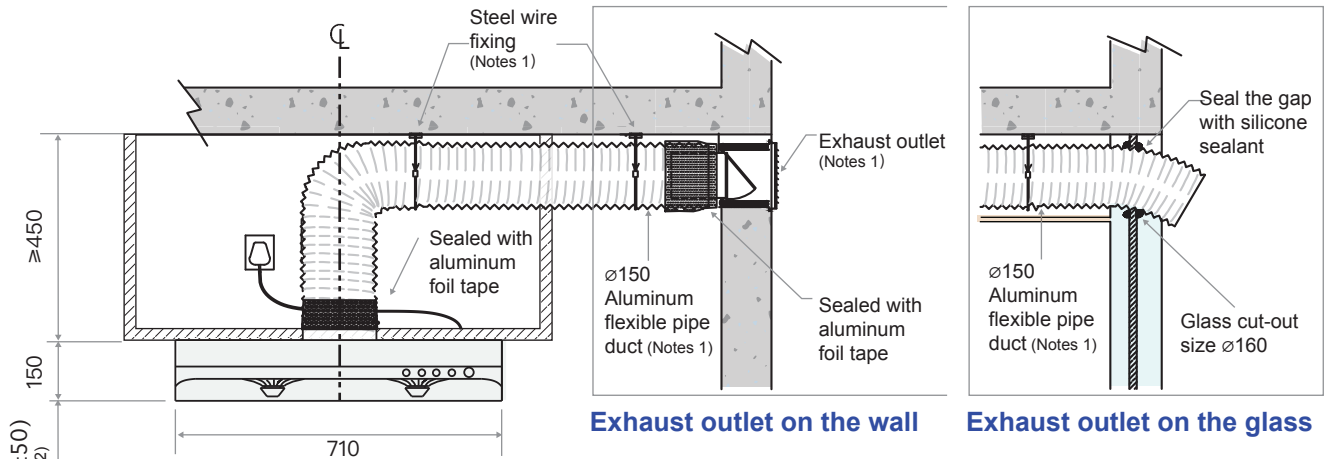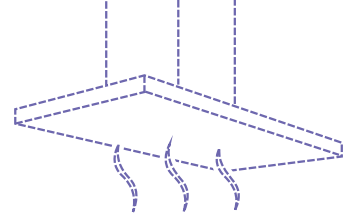


Front View

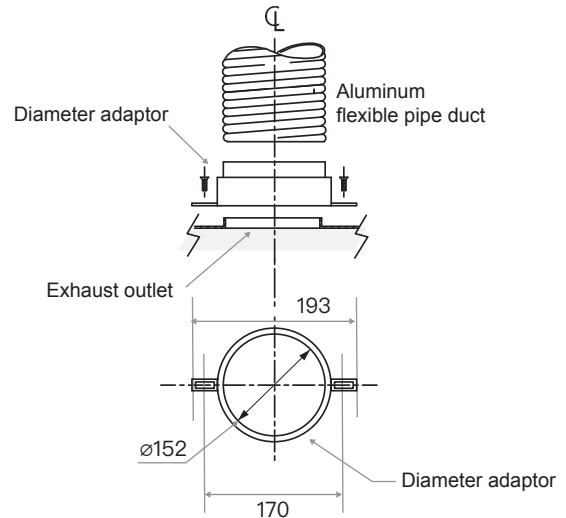

A-A Section View

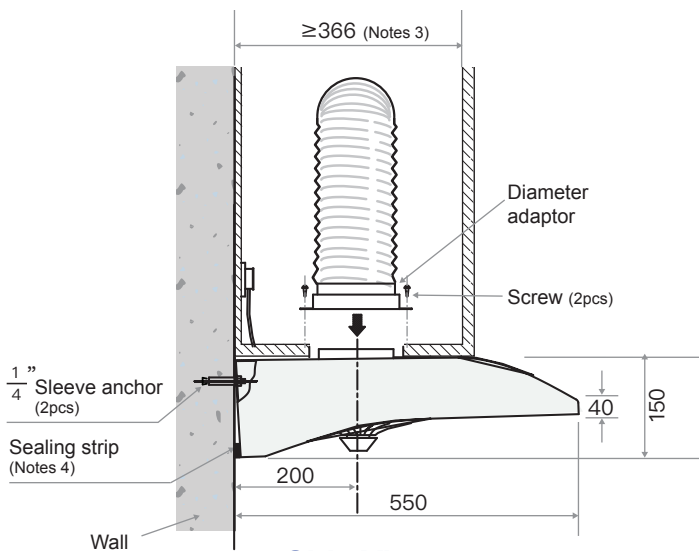

Side View

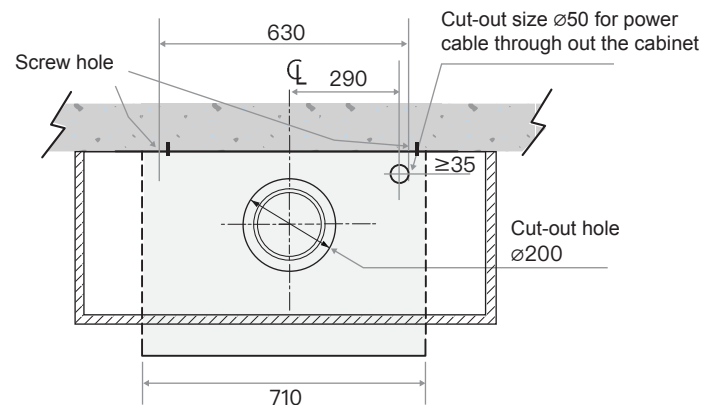

- Notes :**
1. Provided and installed by contractor with additional charge
The distance between steel wire fixing cannot exceed 1500mm
 2. The distance between the pan support of cooking range and the lowest part of range hood should be at least 650mm (with ±50mm tolerance)
 3. Minimum internal depth of kitchen cabinet, excluding door thickness, should not less than 366mm
 4. The sealing strip is affixed along the bottom edge at the back of the machine



Towngas

Towngas
Enterprise 煤氣企業