



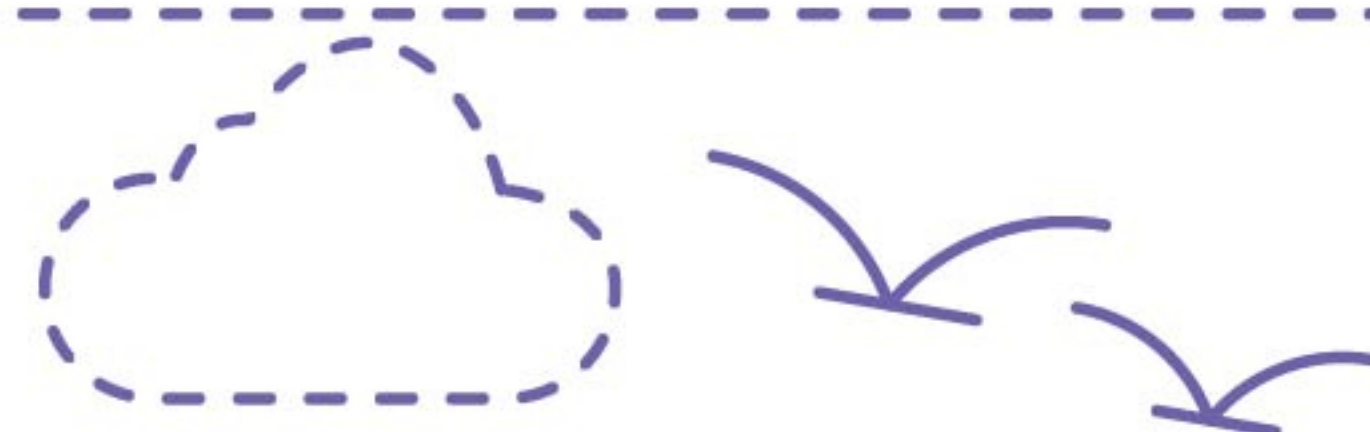

SSTR73DS

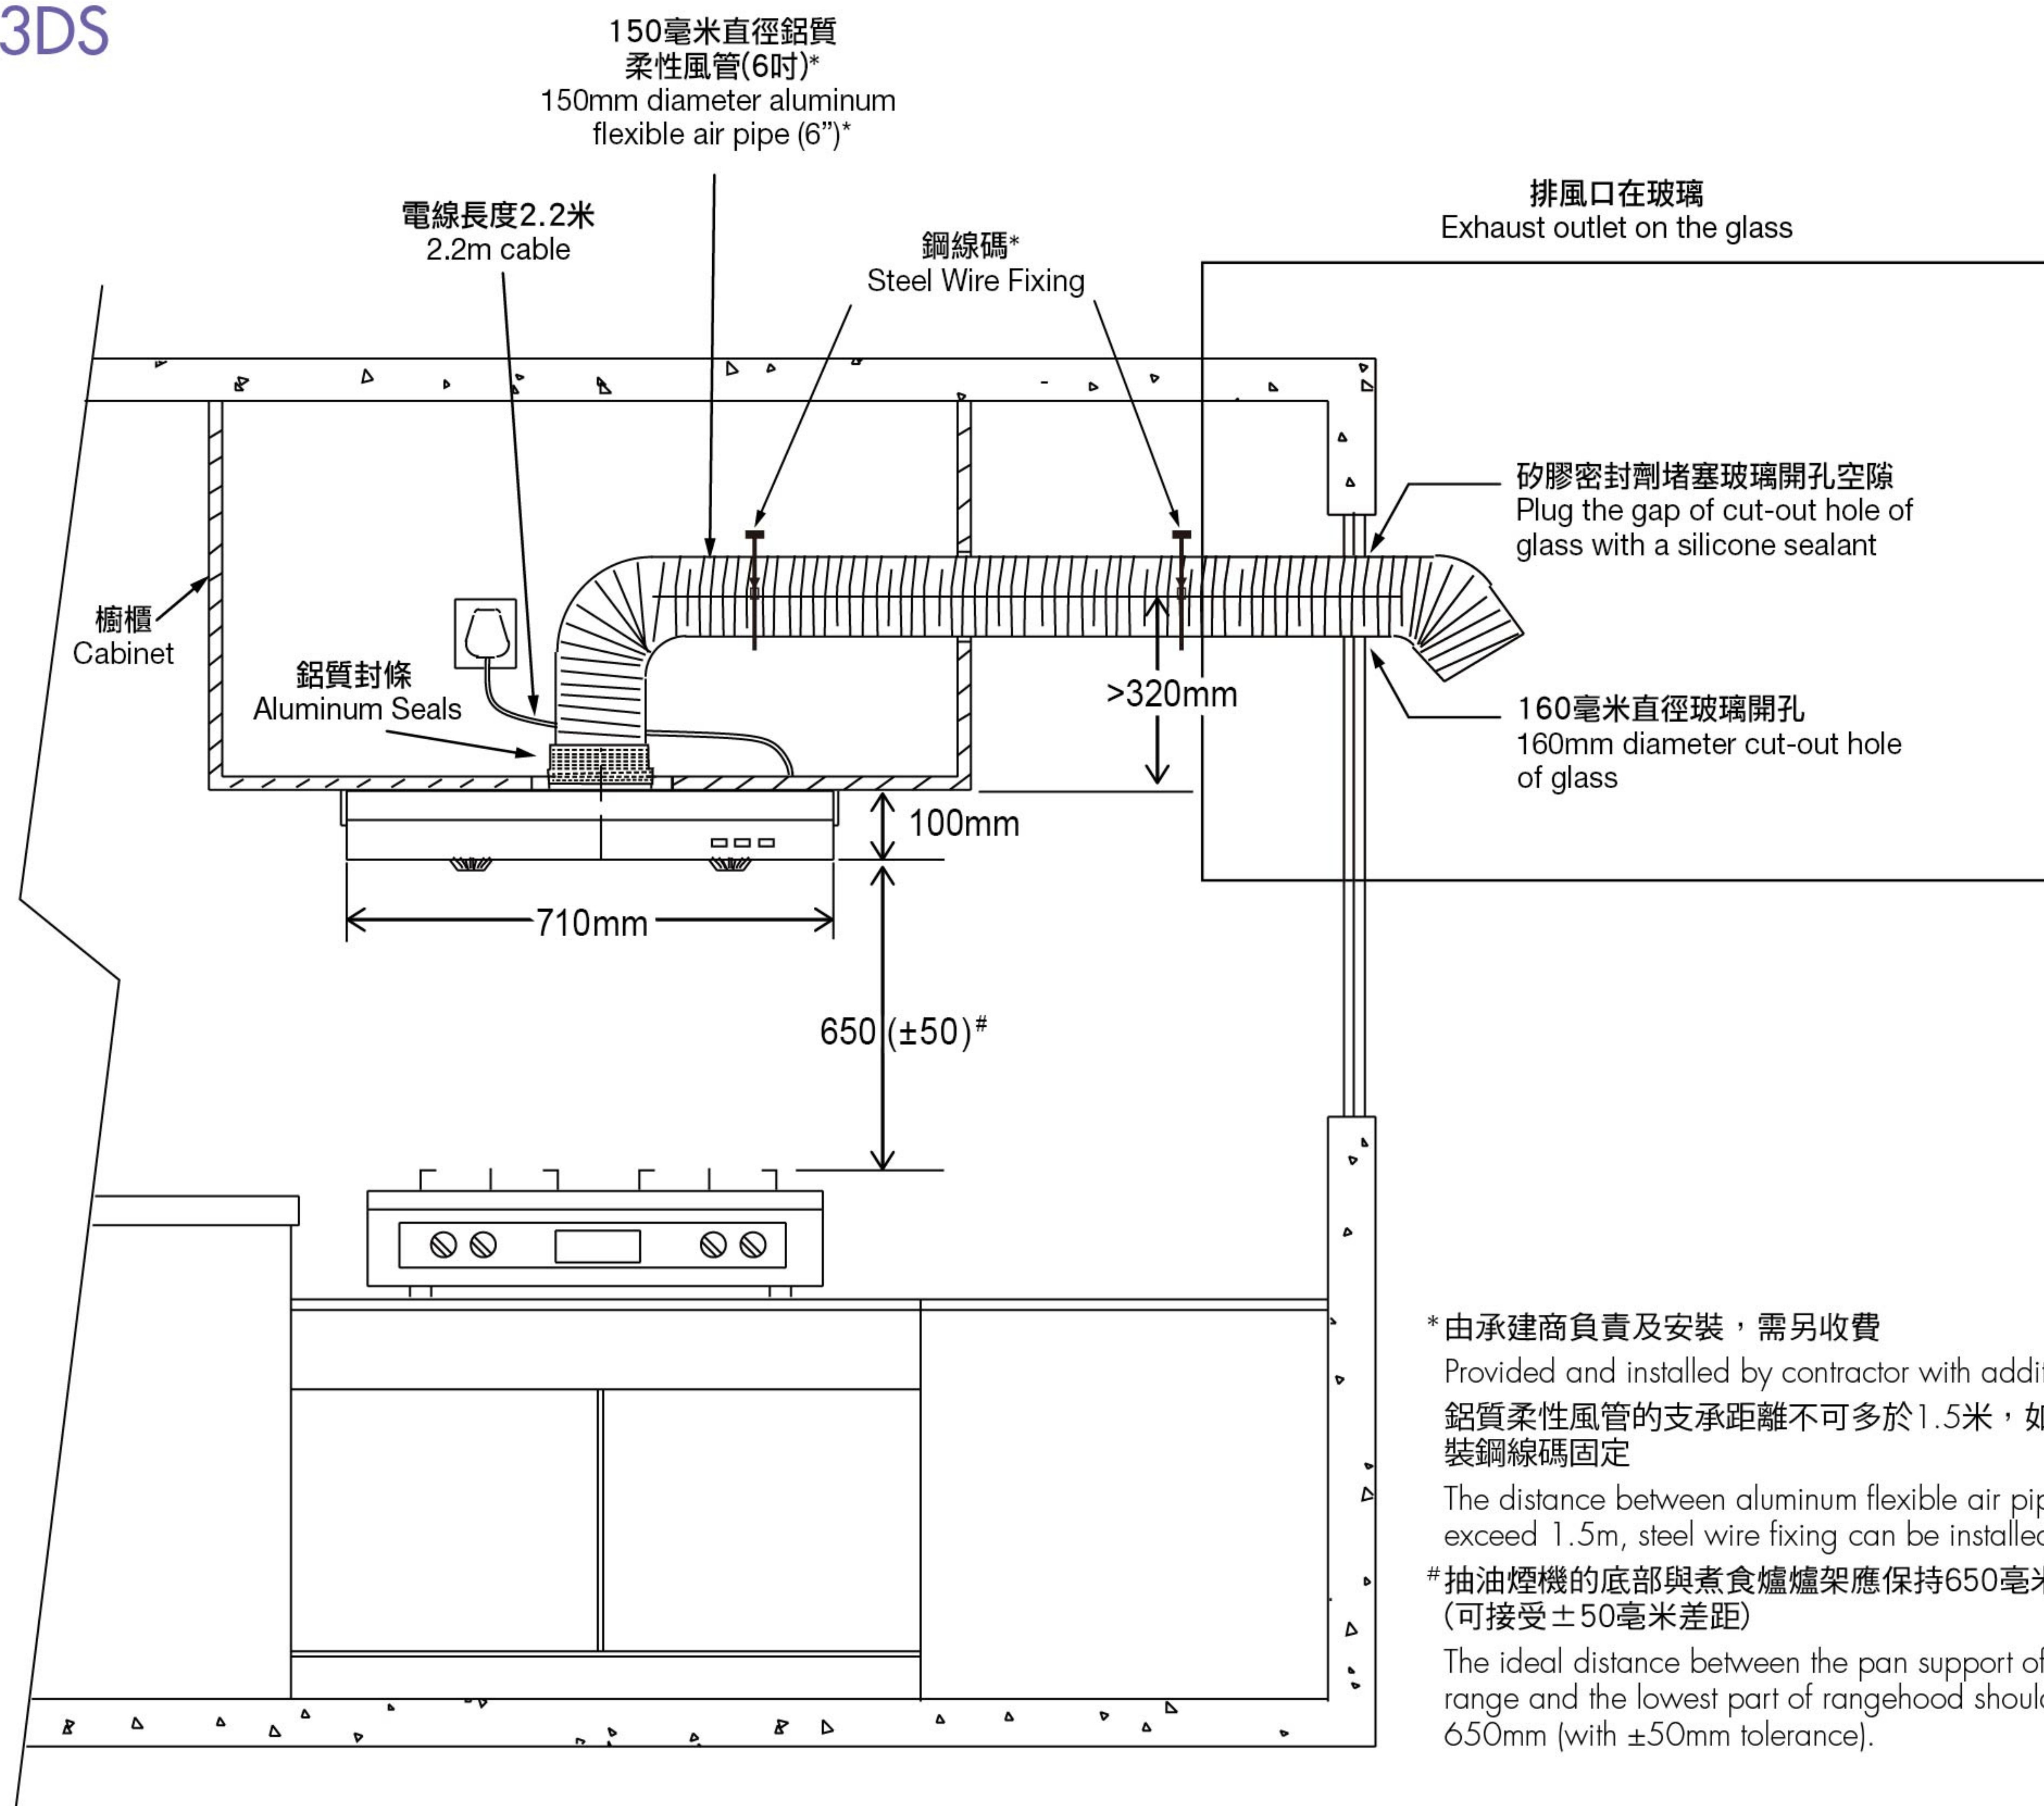

*由承建商負責及安裝，需另收費


Provided and installed by contractor with additional charge
鋁質柔性風管的支承距離不可多於1.5米，如有需要可加
裝鋼線碼固定

The distance between aluminum flexible air pipe cannot
exceed 1.5m, steel wire fixing can be installed as required


#抽油煙機的底部與煮食爐架應保持650毫米距離
(可接受±50毫米差距)

The ideal distance between the pan support of cooking
range and the lowest part of rangehood should be
650mm (with ±50mm tolerance).

正視圖
Front View

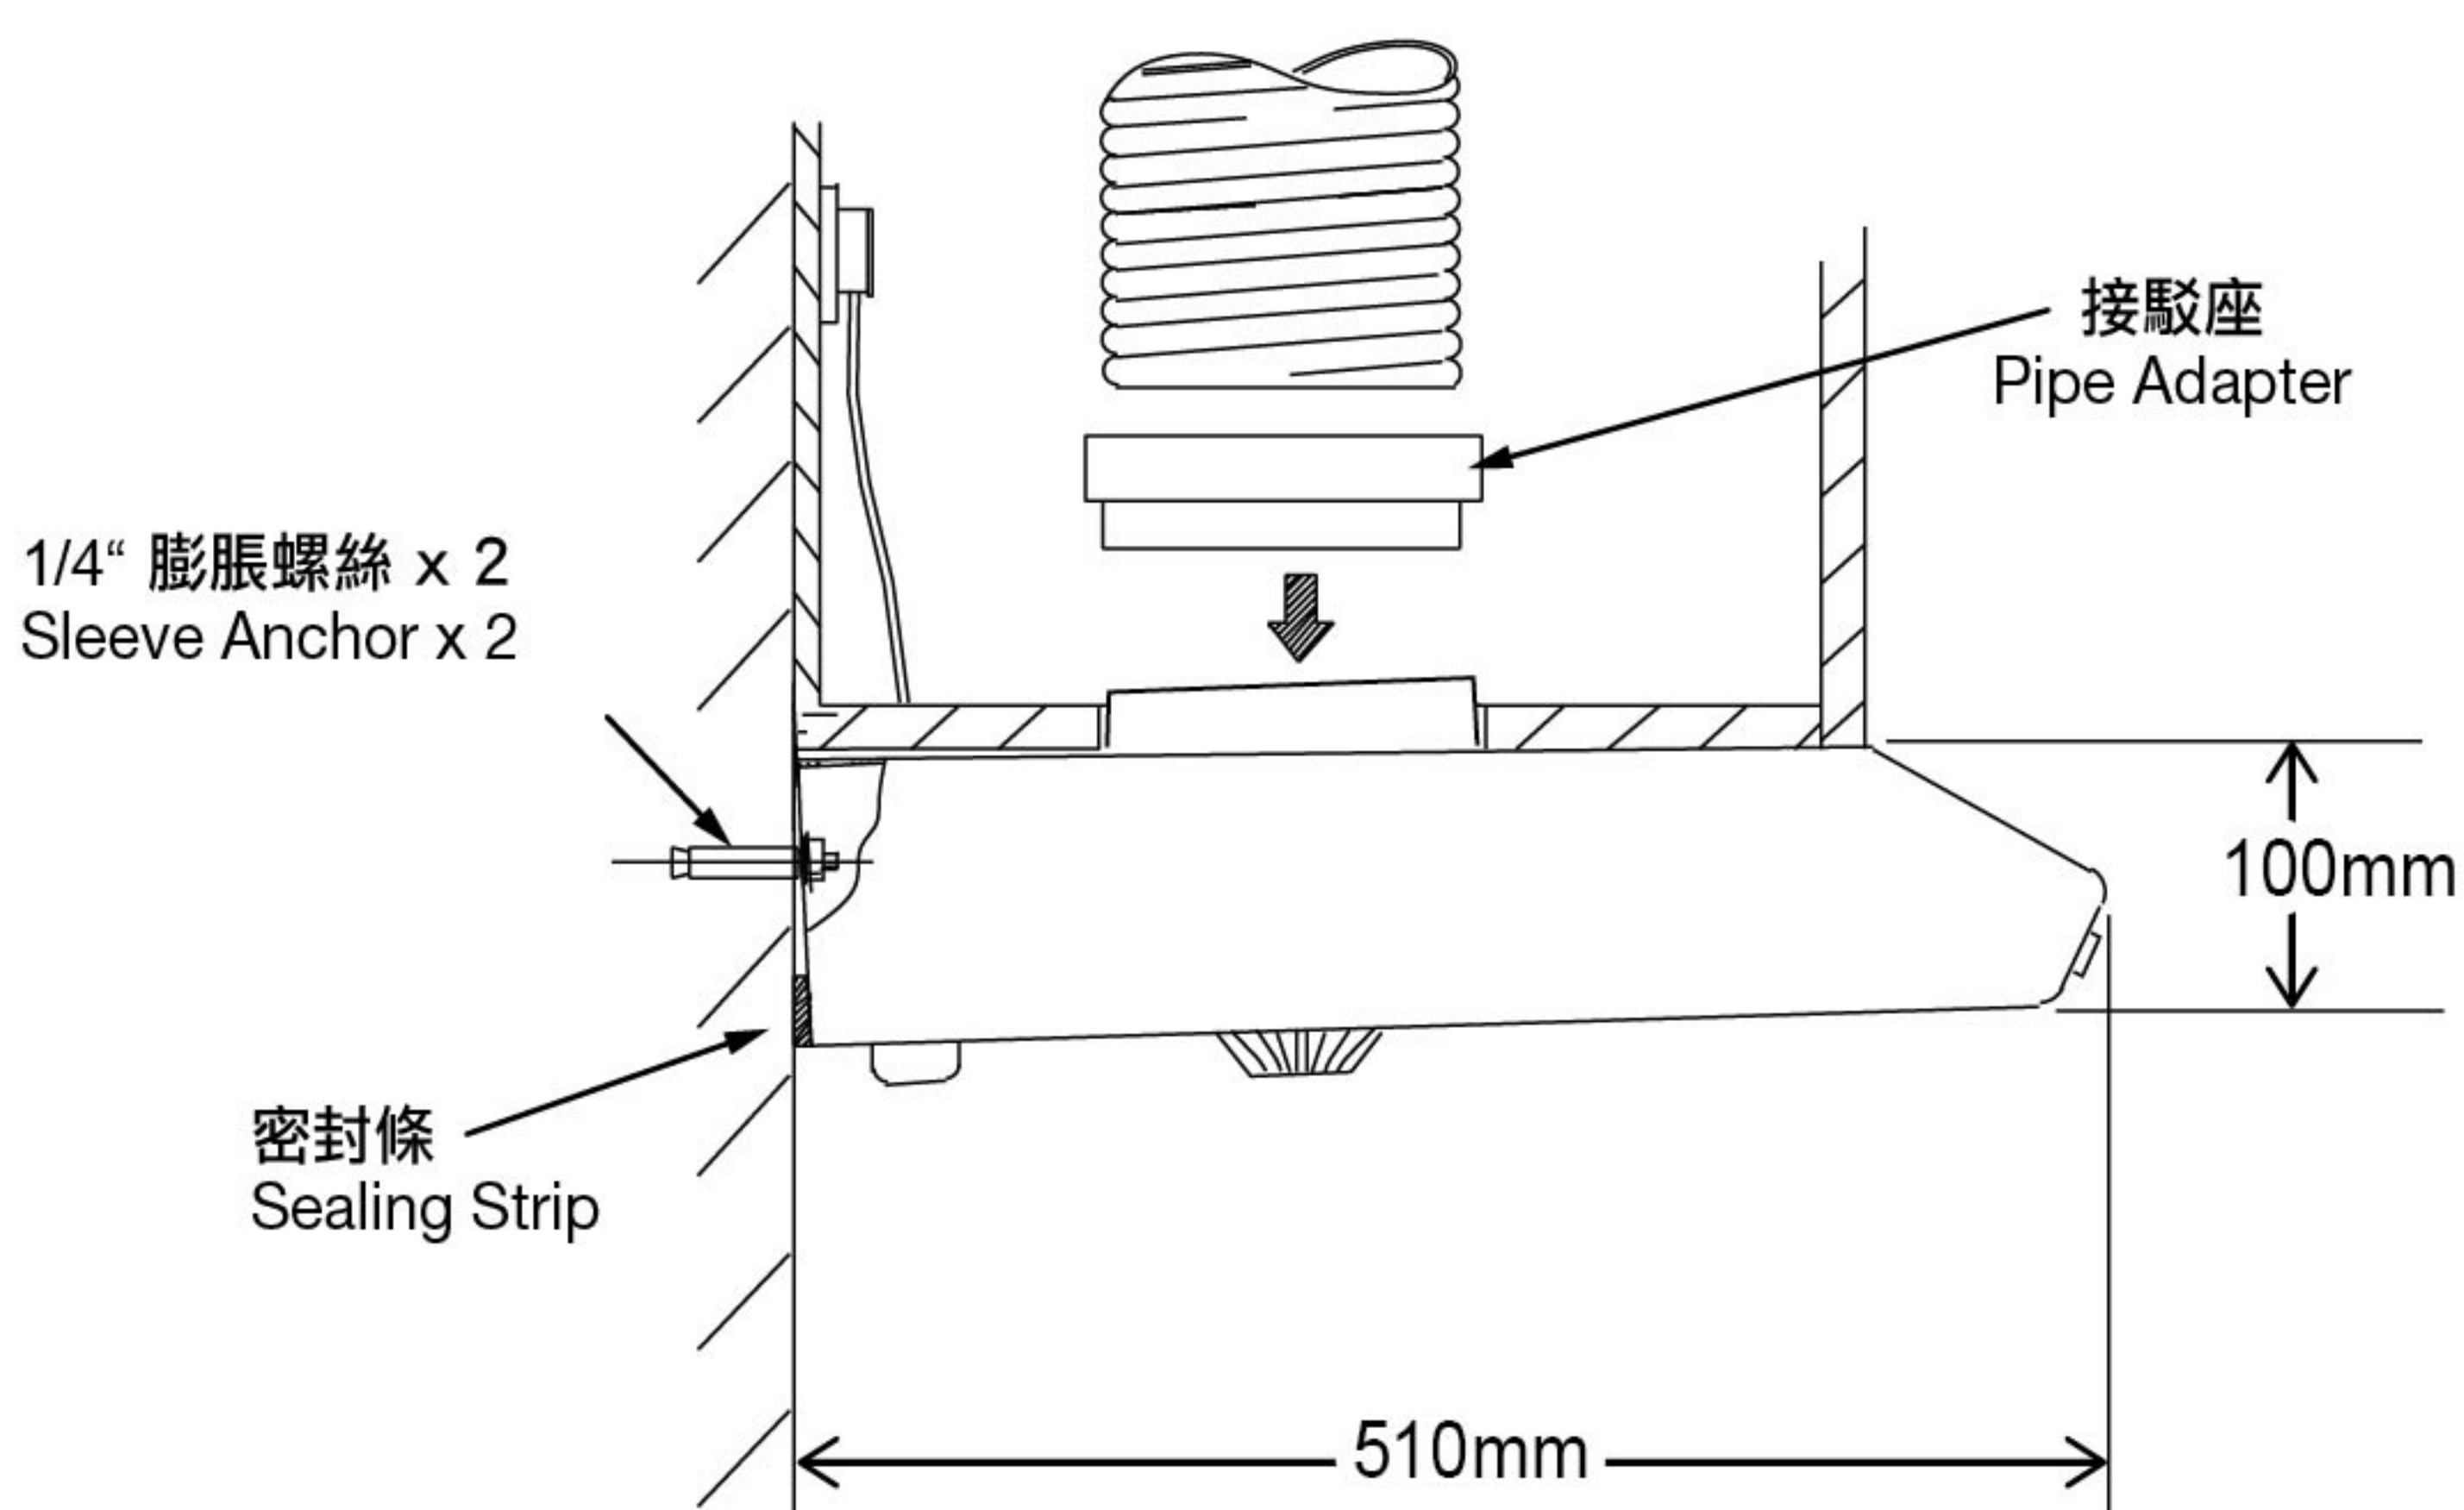


側視圖
Side View

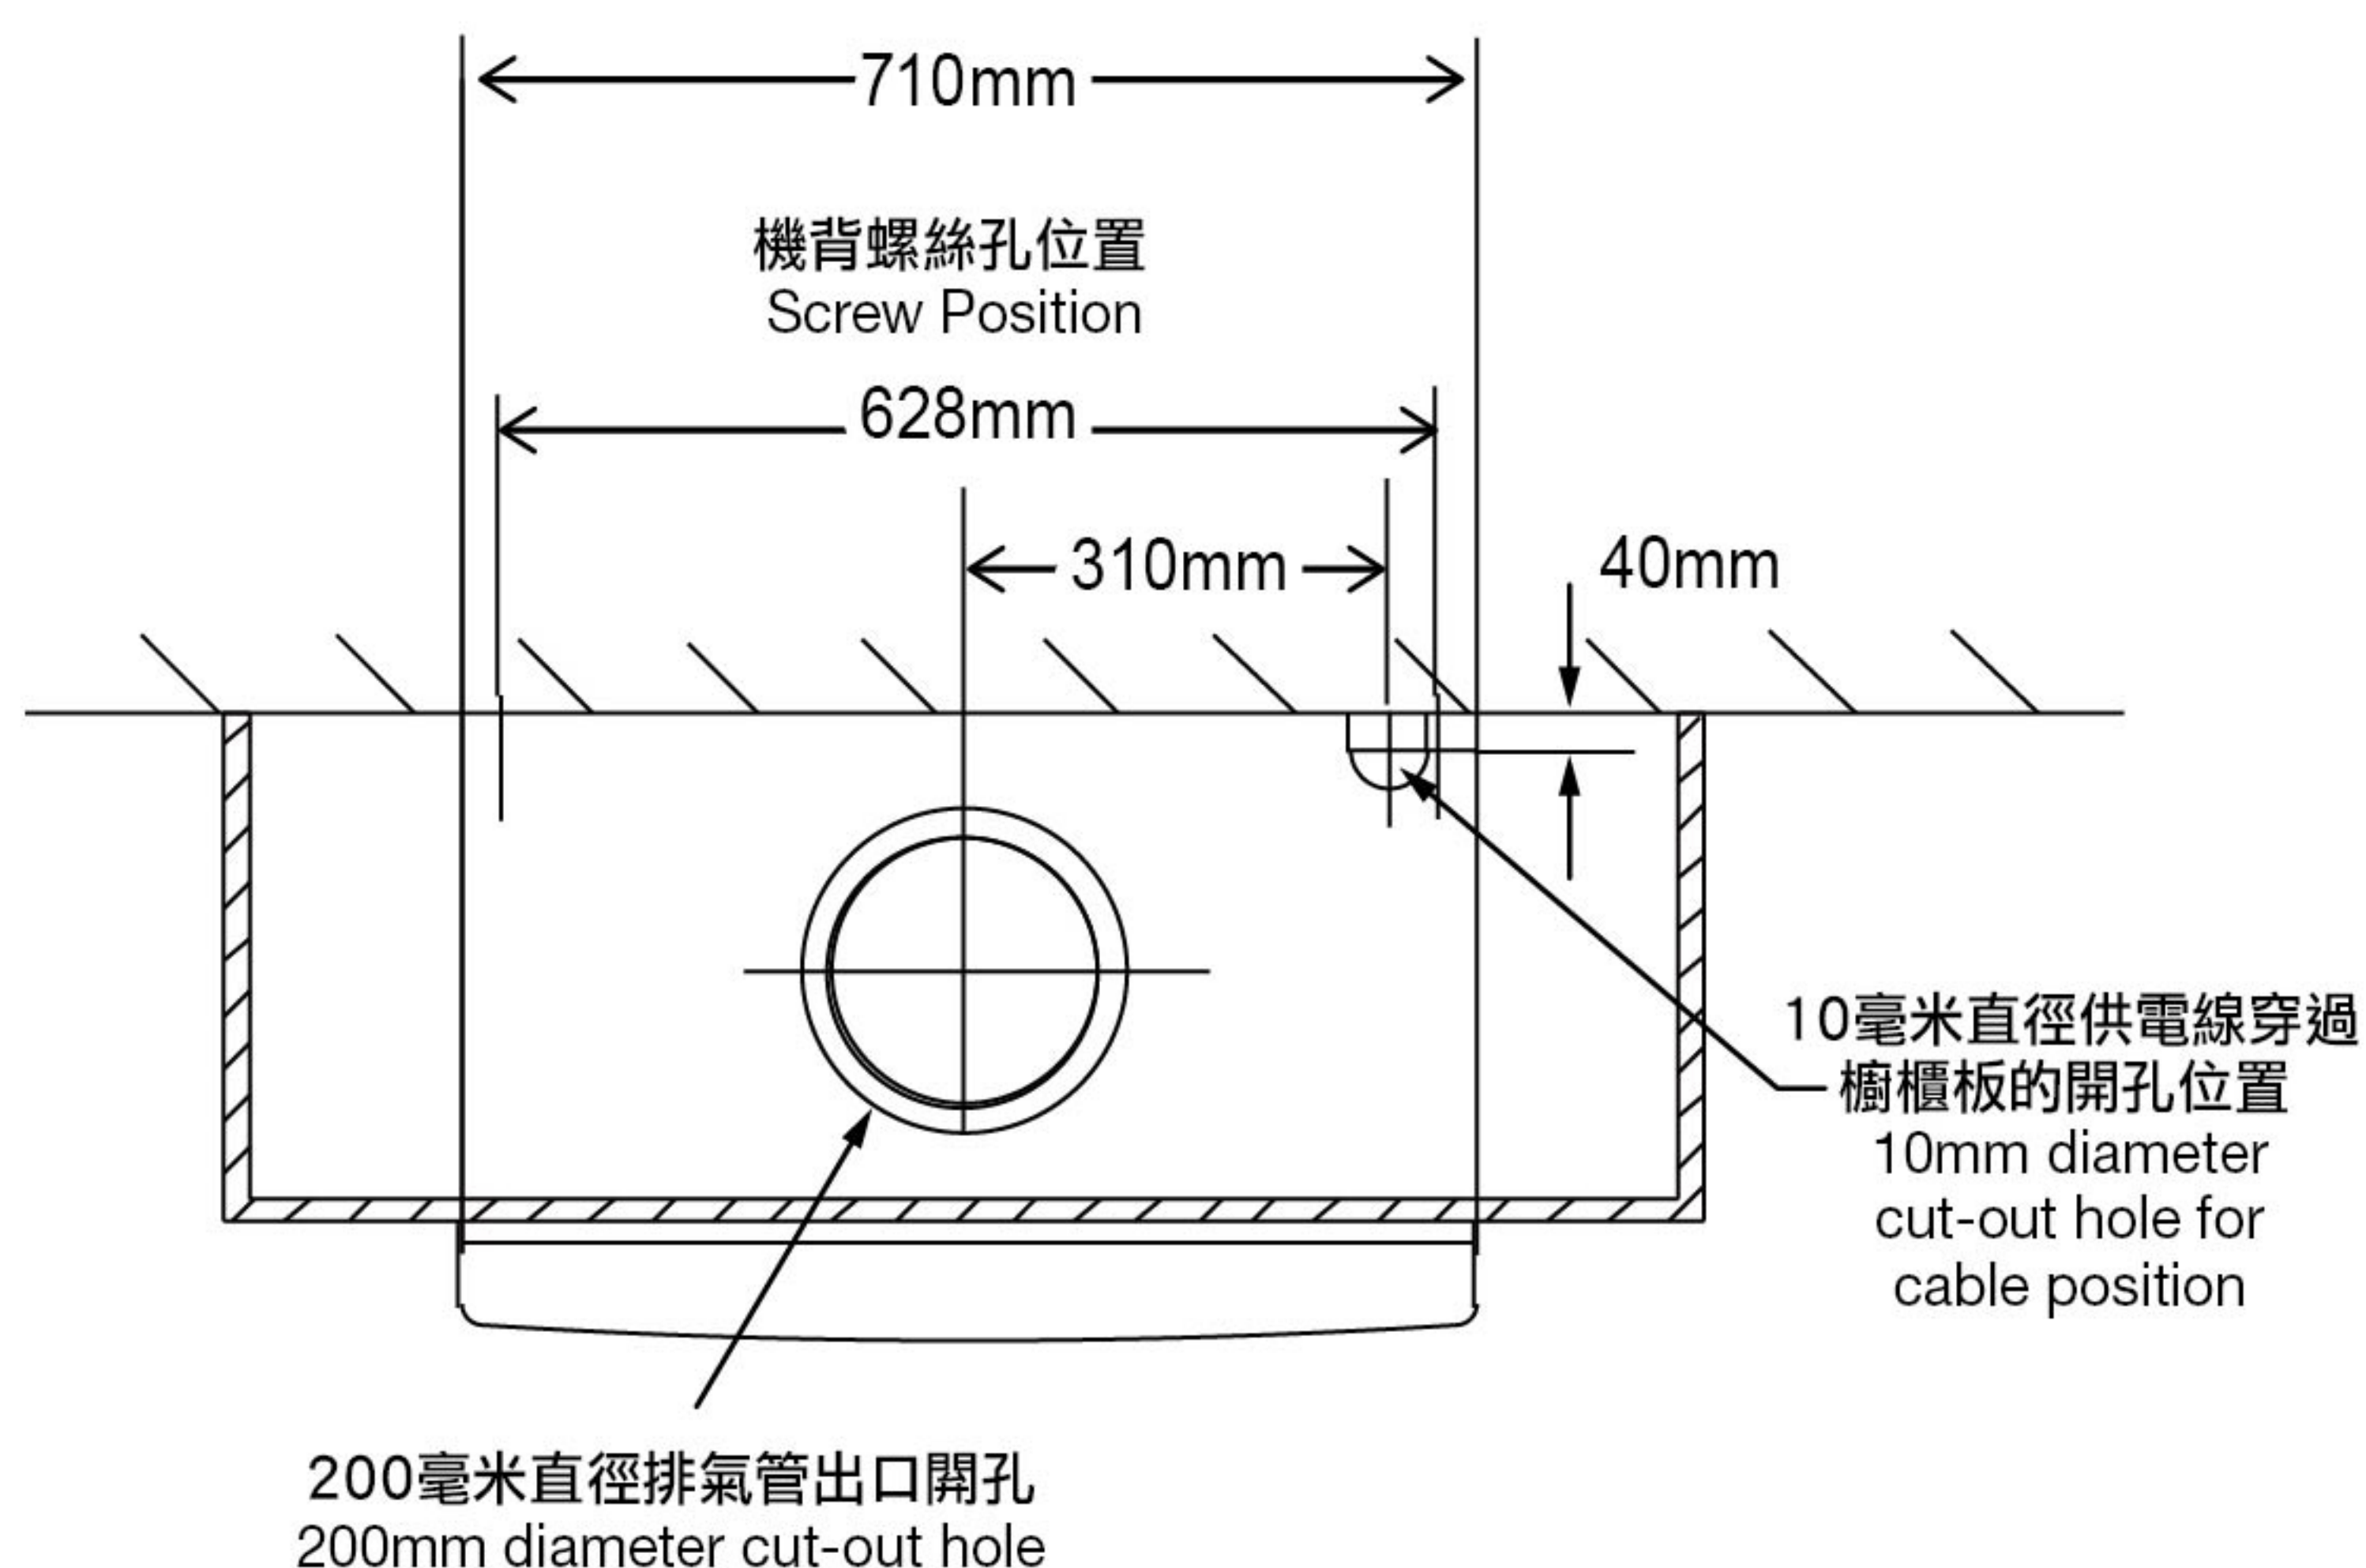

俯視圖
Top View

mm = 毫米

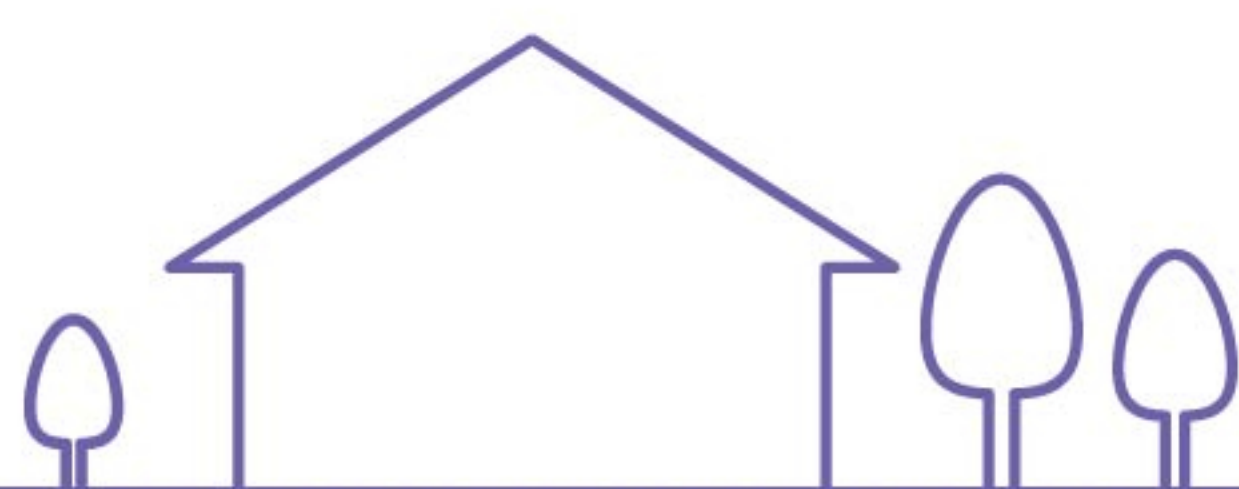

煤氣
Towngas