





抽油煙機

Rangehood

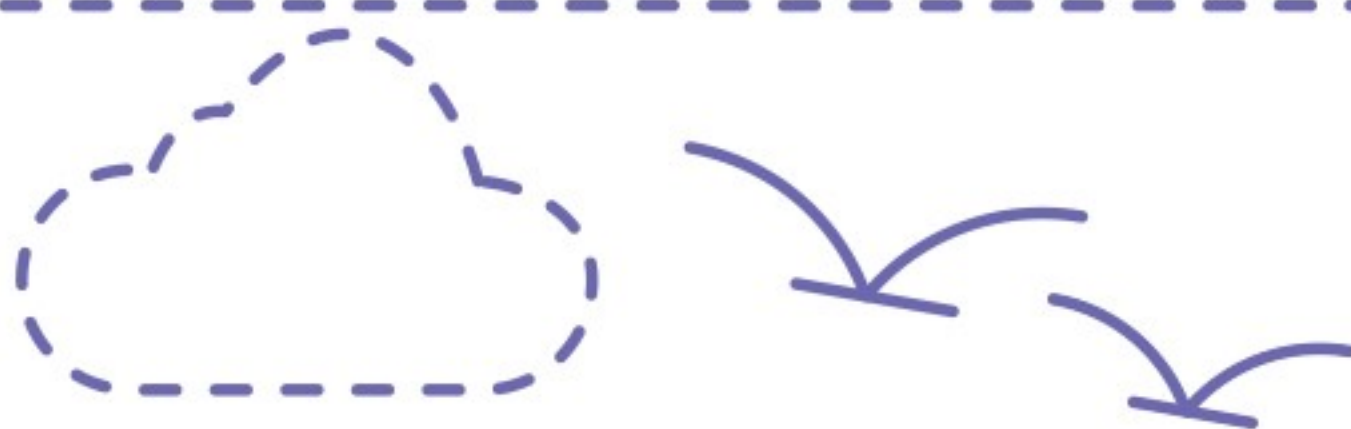

H-Toi 700

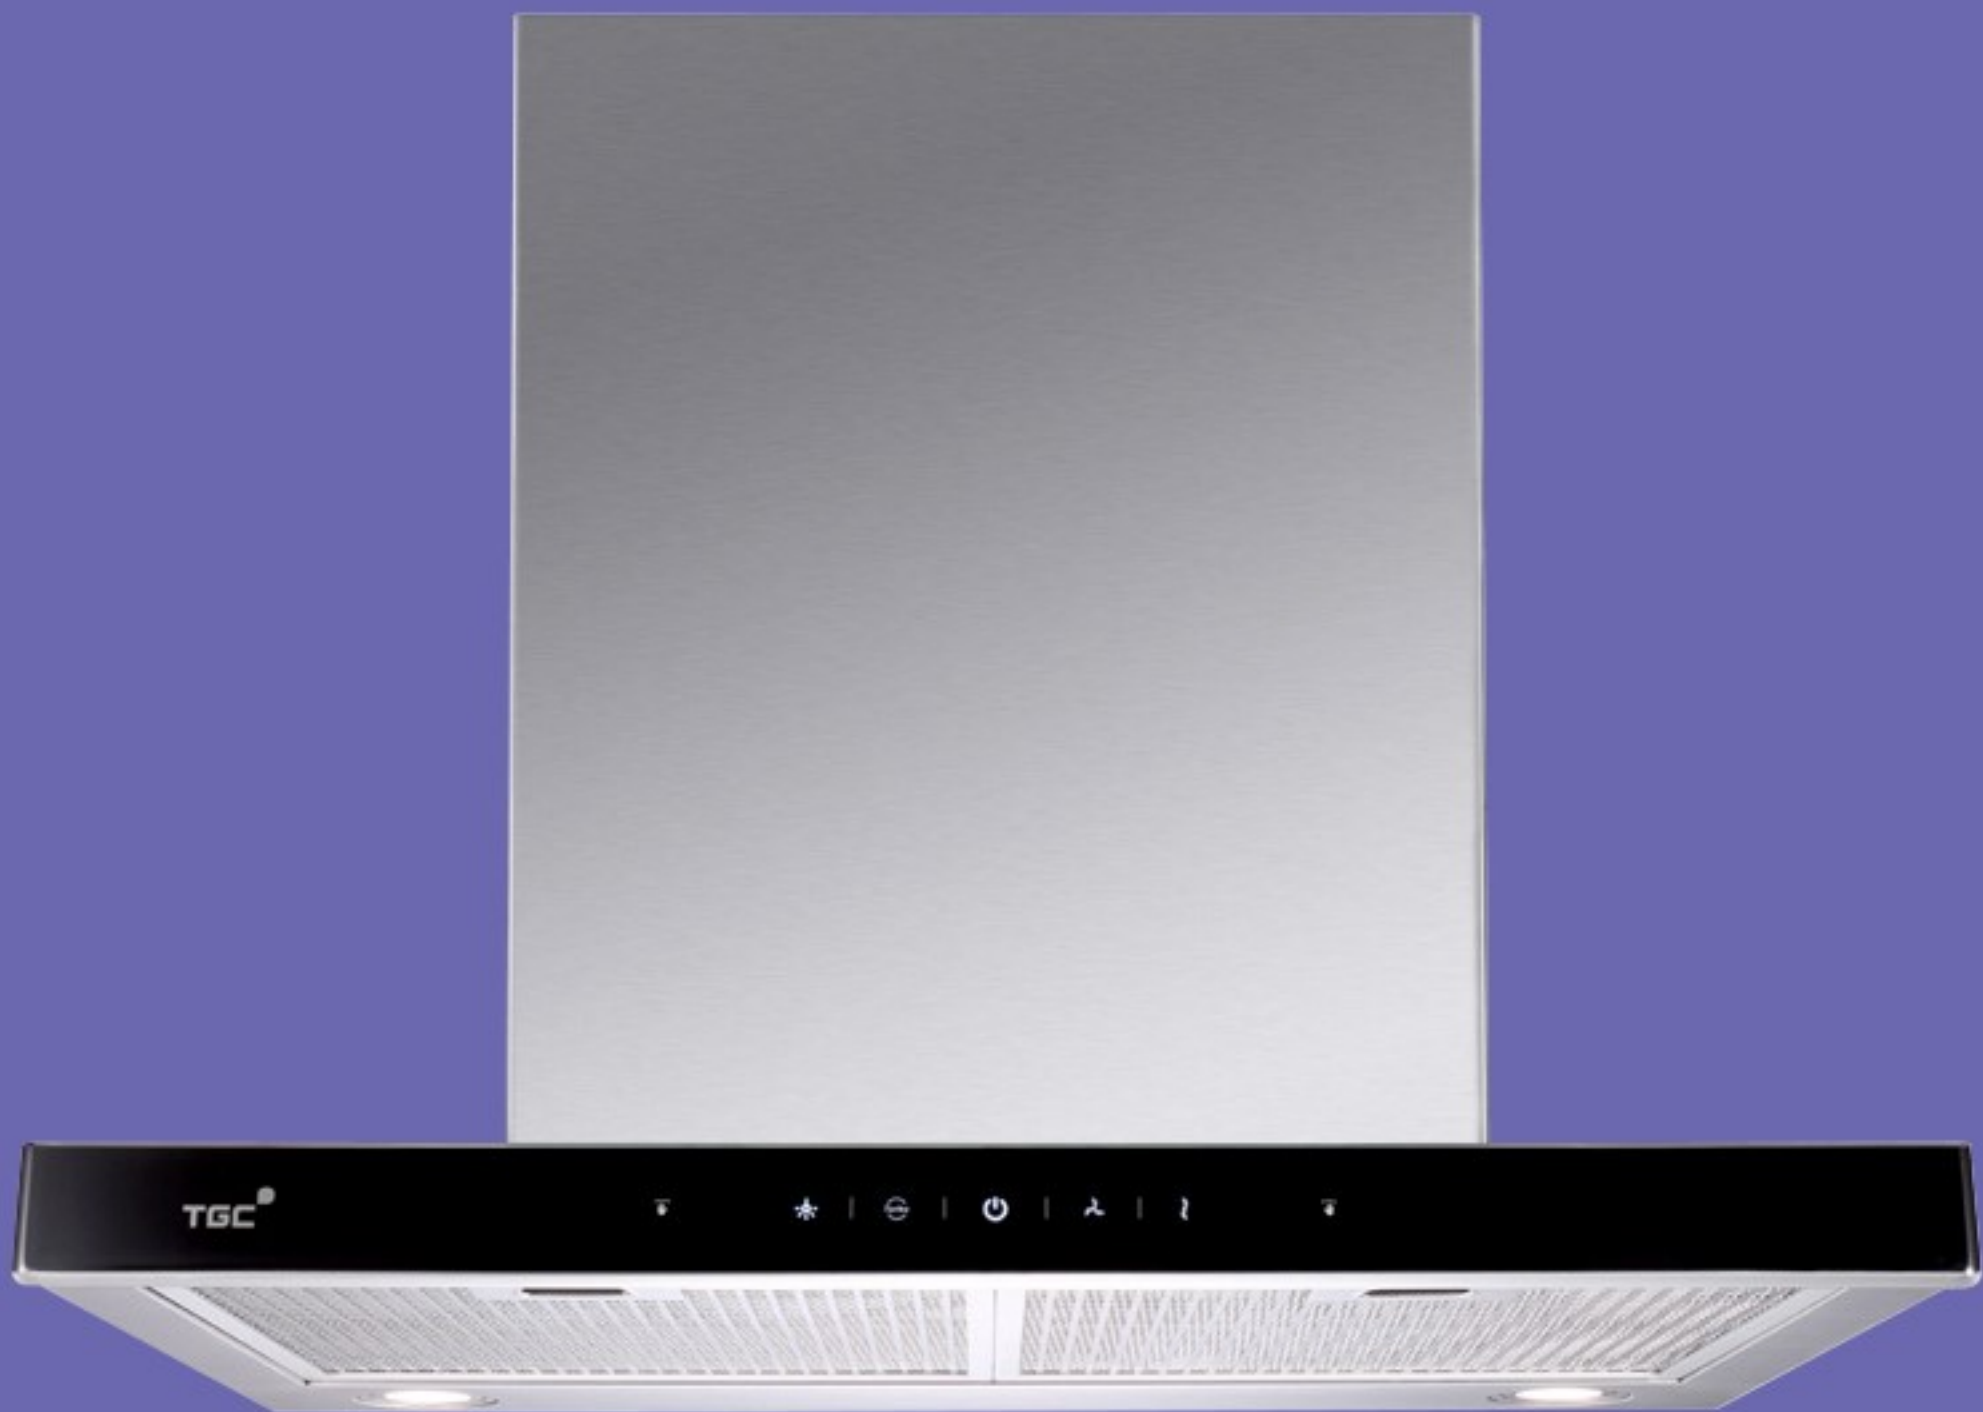

- 免觸碰手勢開關，操作更快捷
Non-contact gesture control allows a quicker access
- 易拆式金屬油煙過濾網，清潔容易
Easily cleaned detachable metal grease filter
- 超強風速設計，最高排風量高達每分鐘21.4立方米
High air flow design, maximum 21.4 m³ exhaust air flow rate per minute
- 5分鐘延遲關機功能
5-minute prolonged off-timer

型號 Model	H-Toi 700
顏色及物料 Colour and Material	黑色玻璃面配不銹鋼機身 Black Glass Panel with Stainless Steel Body
整體尺寸 高 x 闊 x 深 (毫米 / 吋) Dimensions H x W x D (mm/inch)	690-830 x 696 x 485 27.2-32.7 x 27.4 x 19.1
風機類型 Fan Type	離心式單馬達設計 Centrifugal Single Motor
安裝方法 Installation	嵌入式 / 獨立式 Built-in / Free-standing
排風口直徑 (毫米 / 吋) Diameter of Exhaust Pipe (mm/inch)	150 (5.9)
排風量 (每分鐘立方米) (特強, 中, 低) Exhaust Air Flow Rate (m ³ /min) (Turbo, Med, Lo)	21.4 , 16.6, 11.3
馬達轉速 (每分鐘轉動) (特強, 中, 低) Motor Speed (r.p.m) (Turbo, Med, Lo)	1093, 991, 699
馬達耗電量 (瓦) Motor Power Consumption (W)	264
電源供應 Electric Supply	交流電 220 伏特 (50赫) AC 220V (50Hz)
照明 (瓦) Illumination (W)	2W LED x 2

抽油煙機安裝需另外收費# A fee will be charged for rangehood installation#

免

費永久保養(首3年包零件)#
Free lifetime warranty
(First 3 years including parts)

免

費送貨服務#
Free delivery service

#須受條款約束。Terms and conditions apply.


www.towngasappliance.com

f


Towngas Appliance

Q



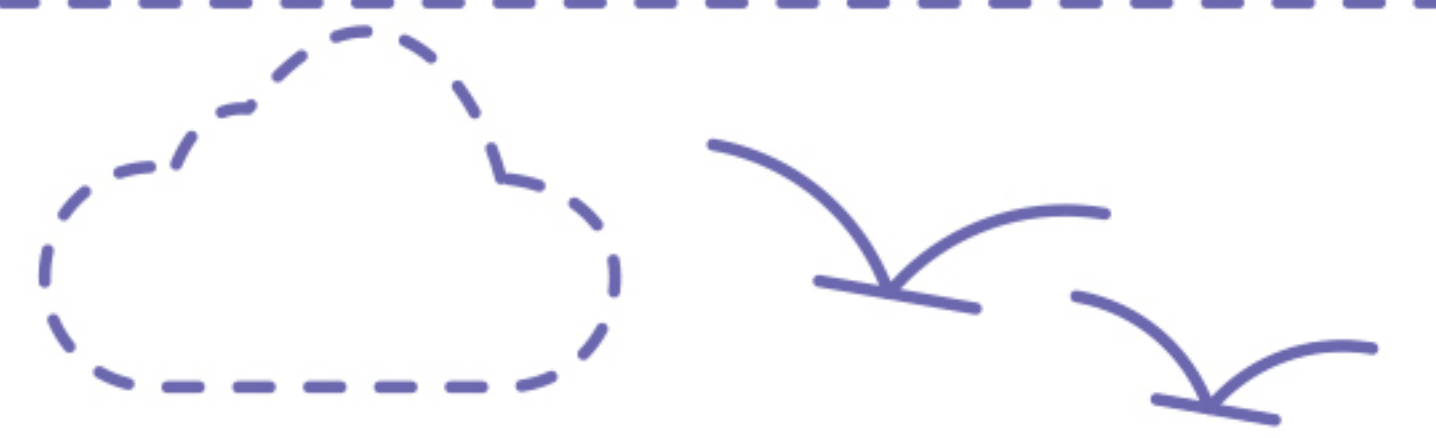


H-Toi 700

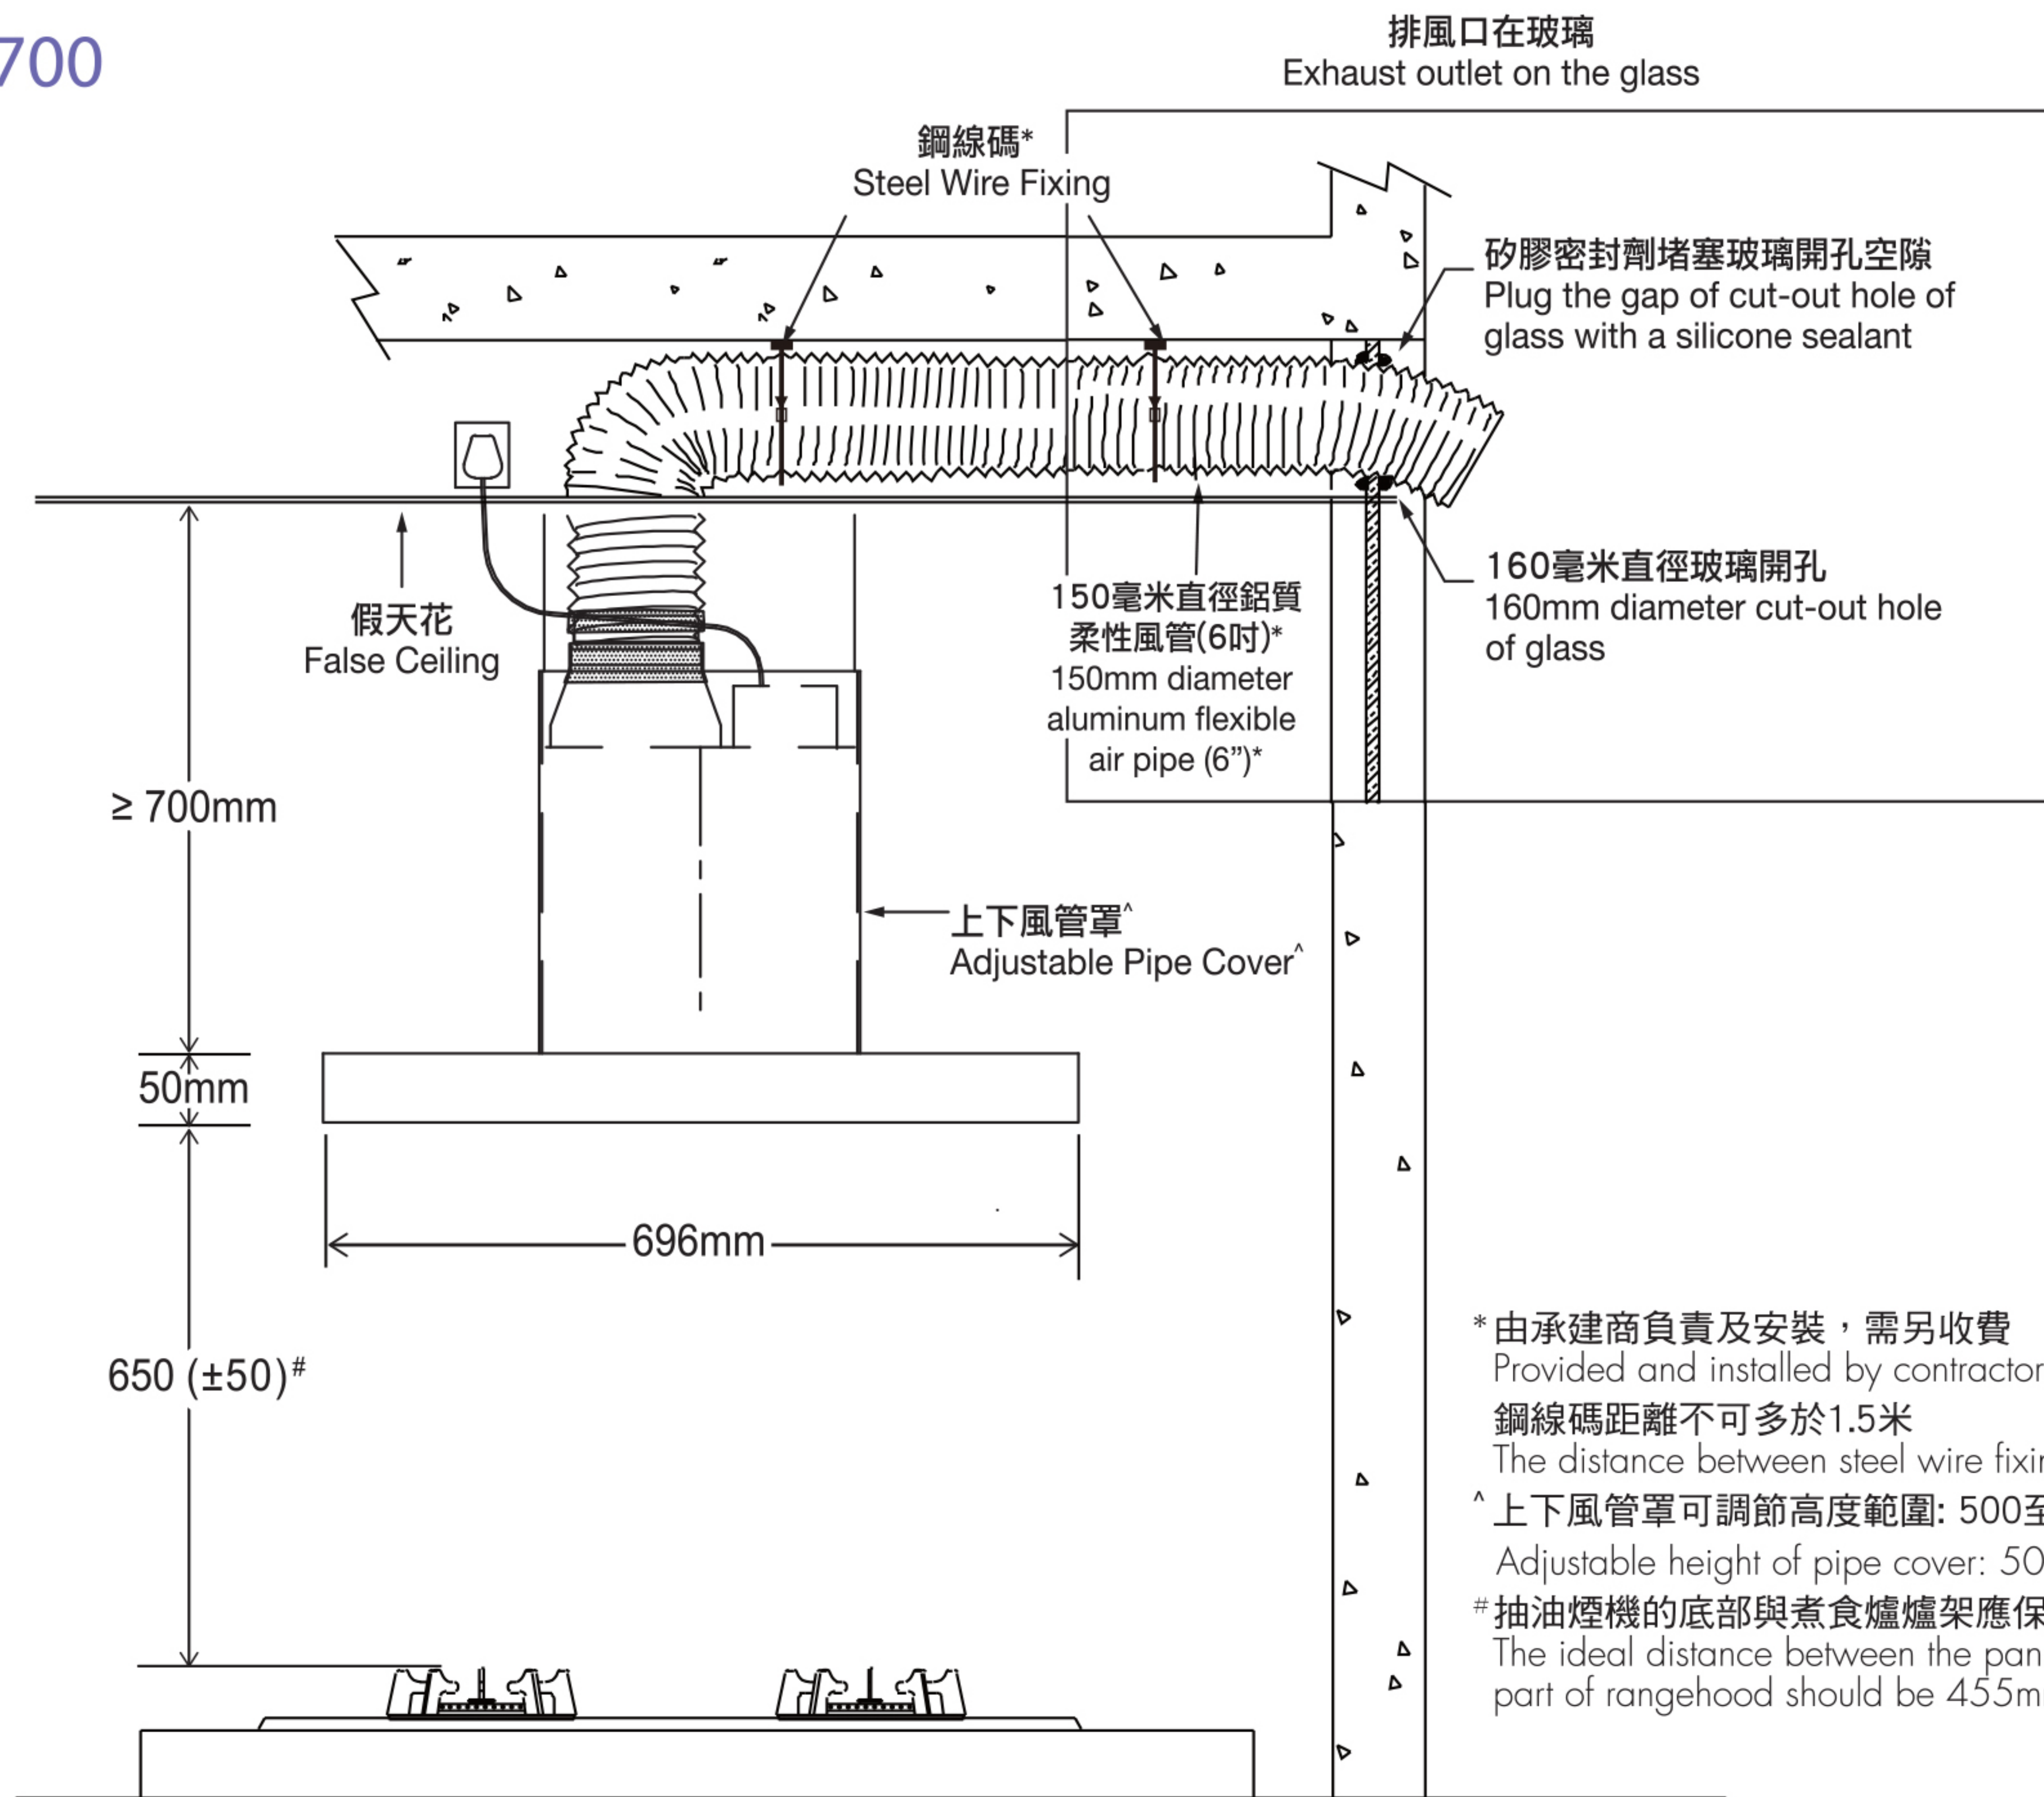


- * 由承建商負責及安裝，需另收費
Provided and installed by contractor with additional charge
- 鋼線碼距離不可多於1.5米
The distance between steel wire fixing cannot exceed 1.5m
- ^ 上下風管罩可調節高度範圍：500至780毫米
Adjustable height of pipe cover: 500 - 780mm
- # 抽油煙機的底部與煮食爐爐架應保持650毫米距離（可接受±50毫米差距）
The ideal distance between the pan support of cooking range and the lowest part of rangehood should be 455mm (with ±50mm tolerance).


正視圖
Front View

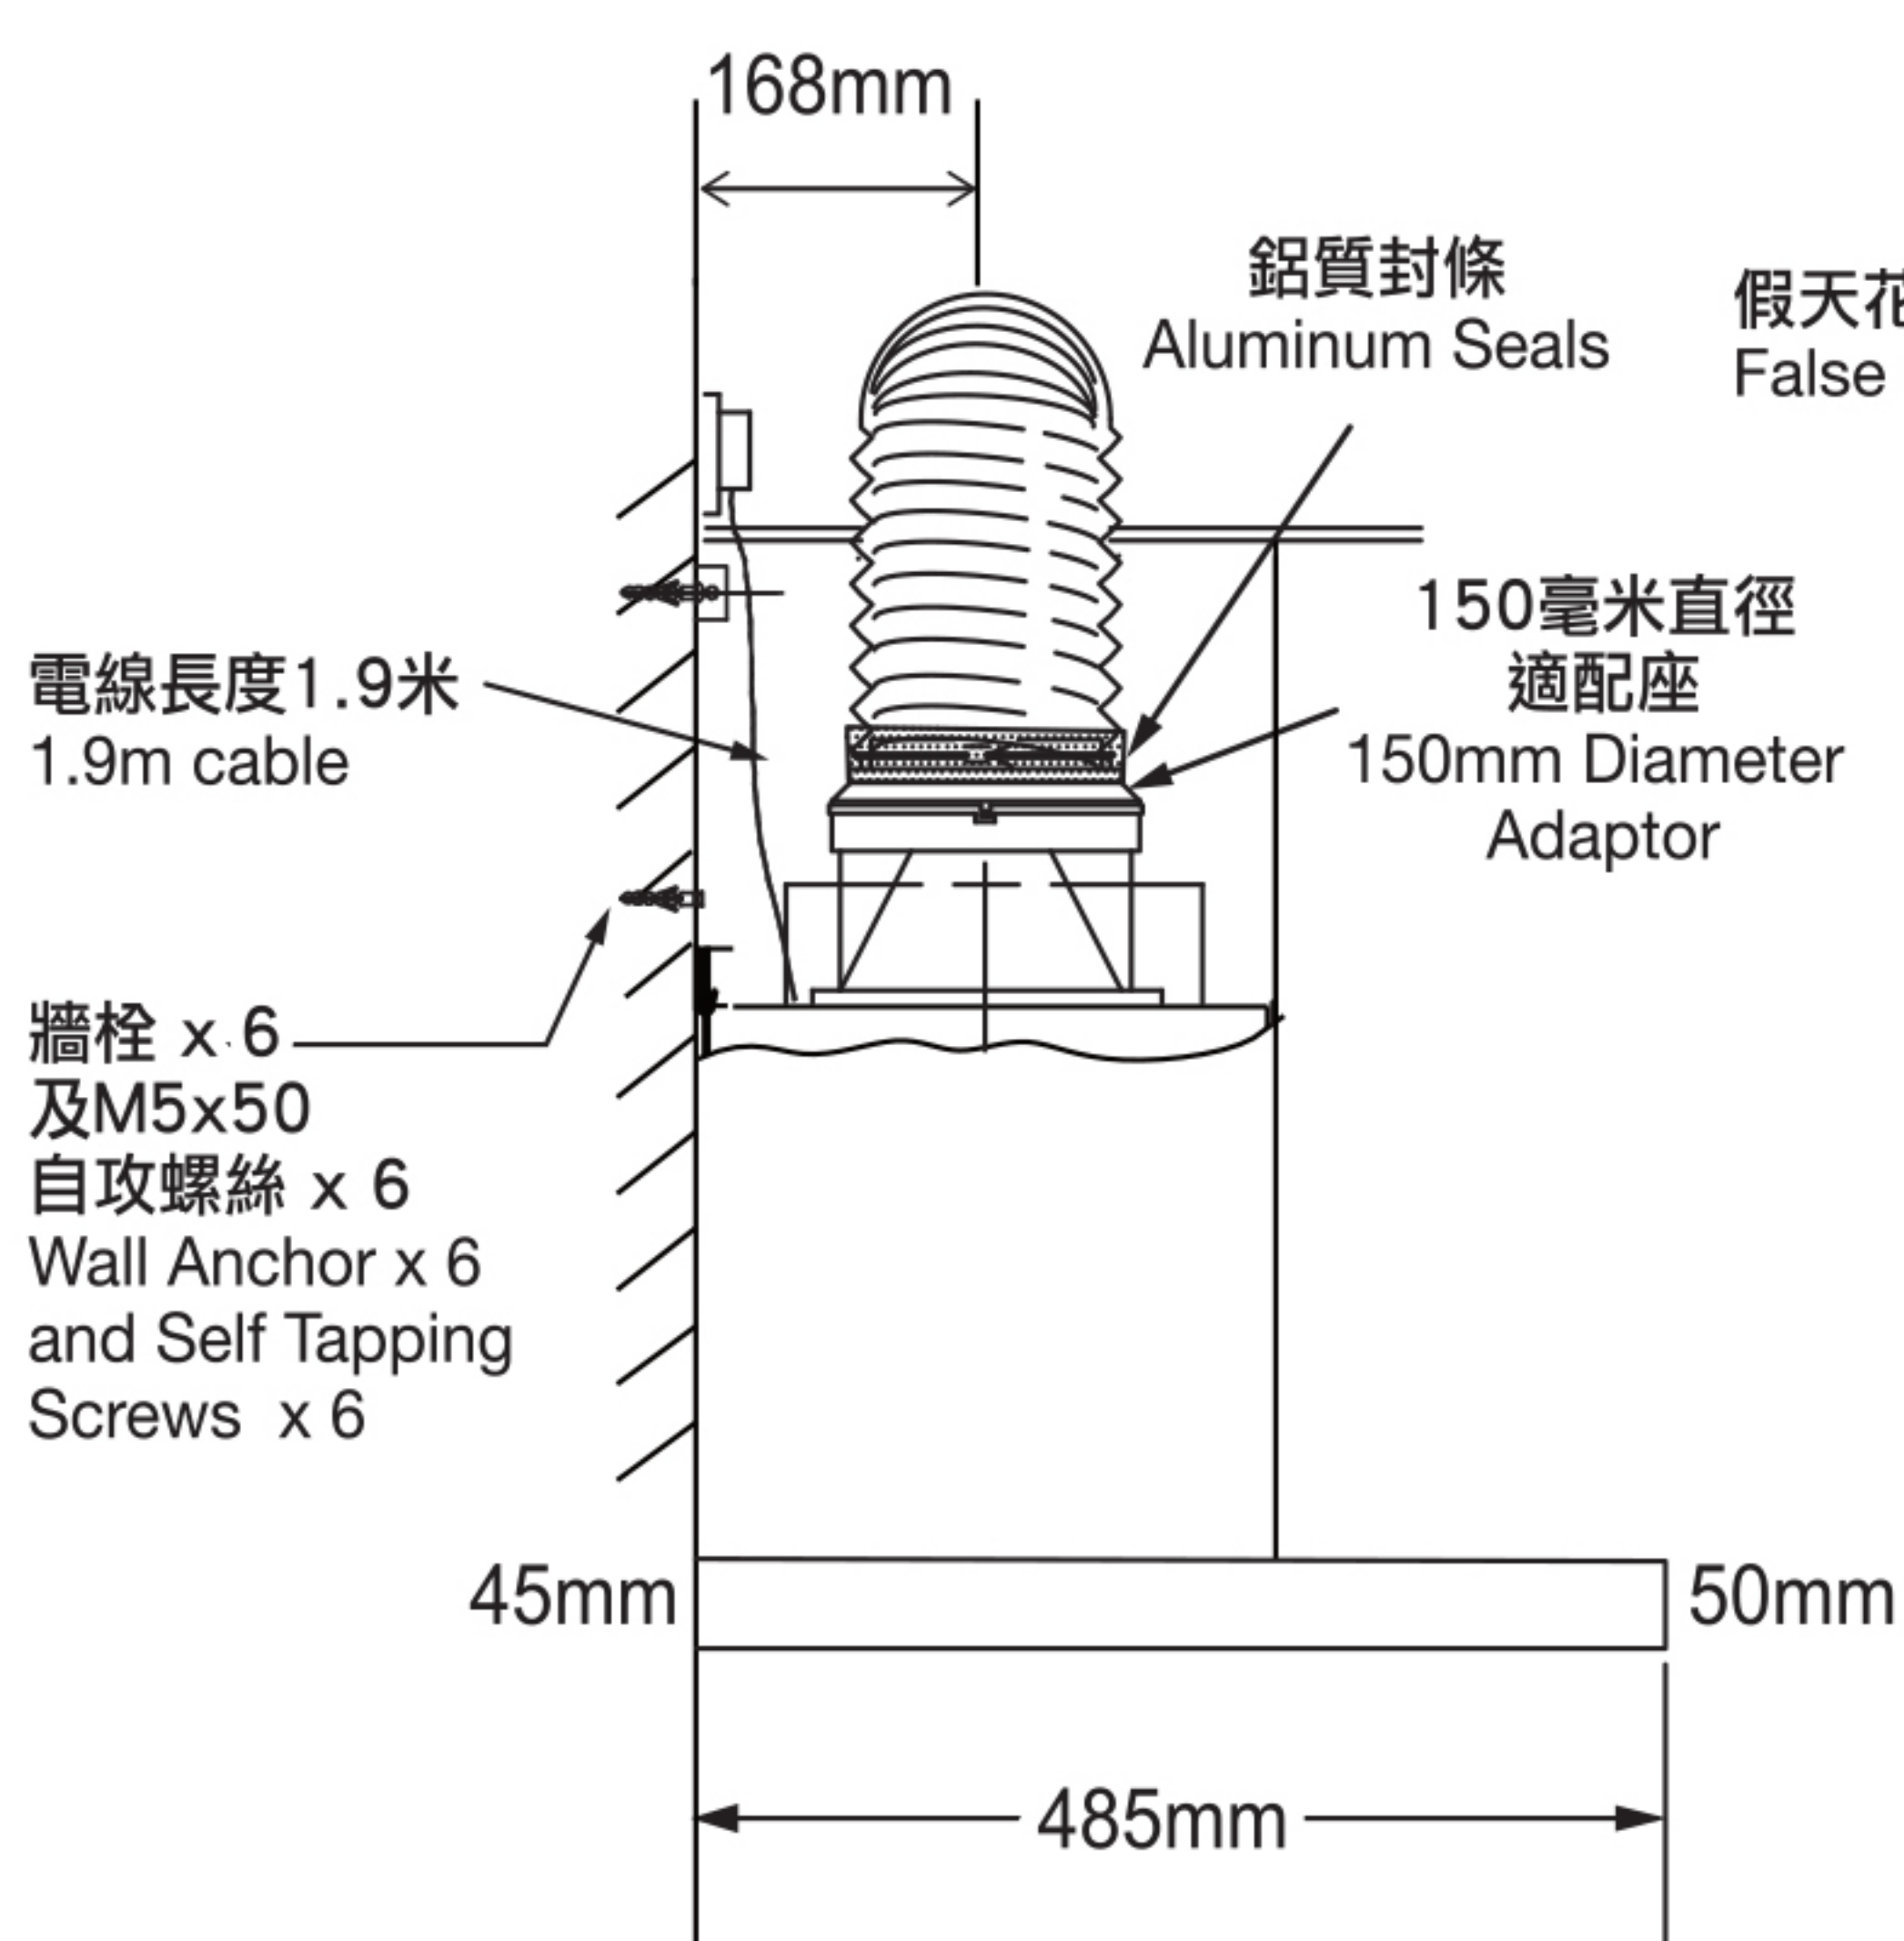


側視圖
Side View

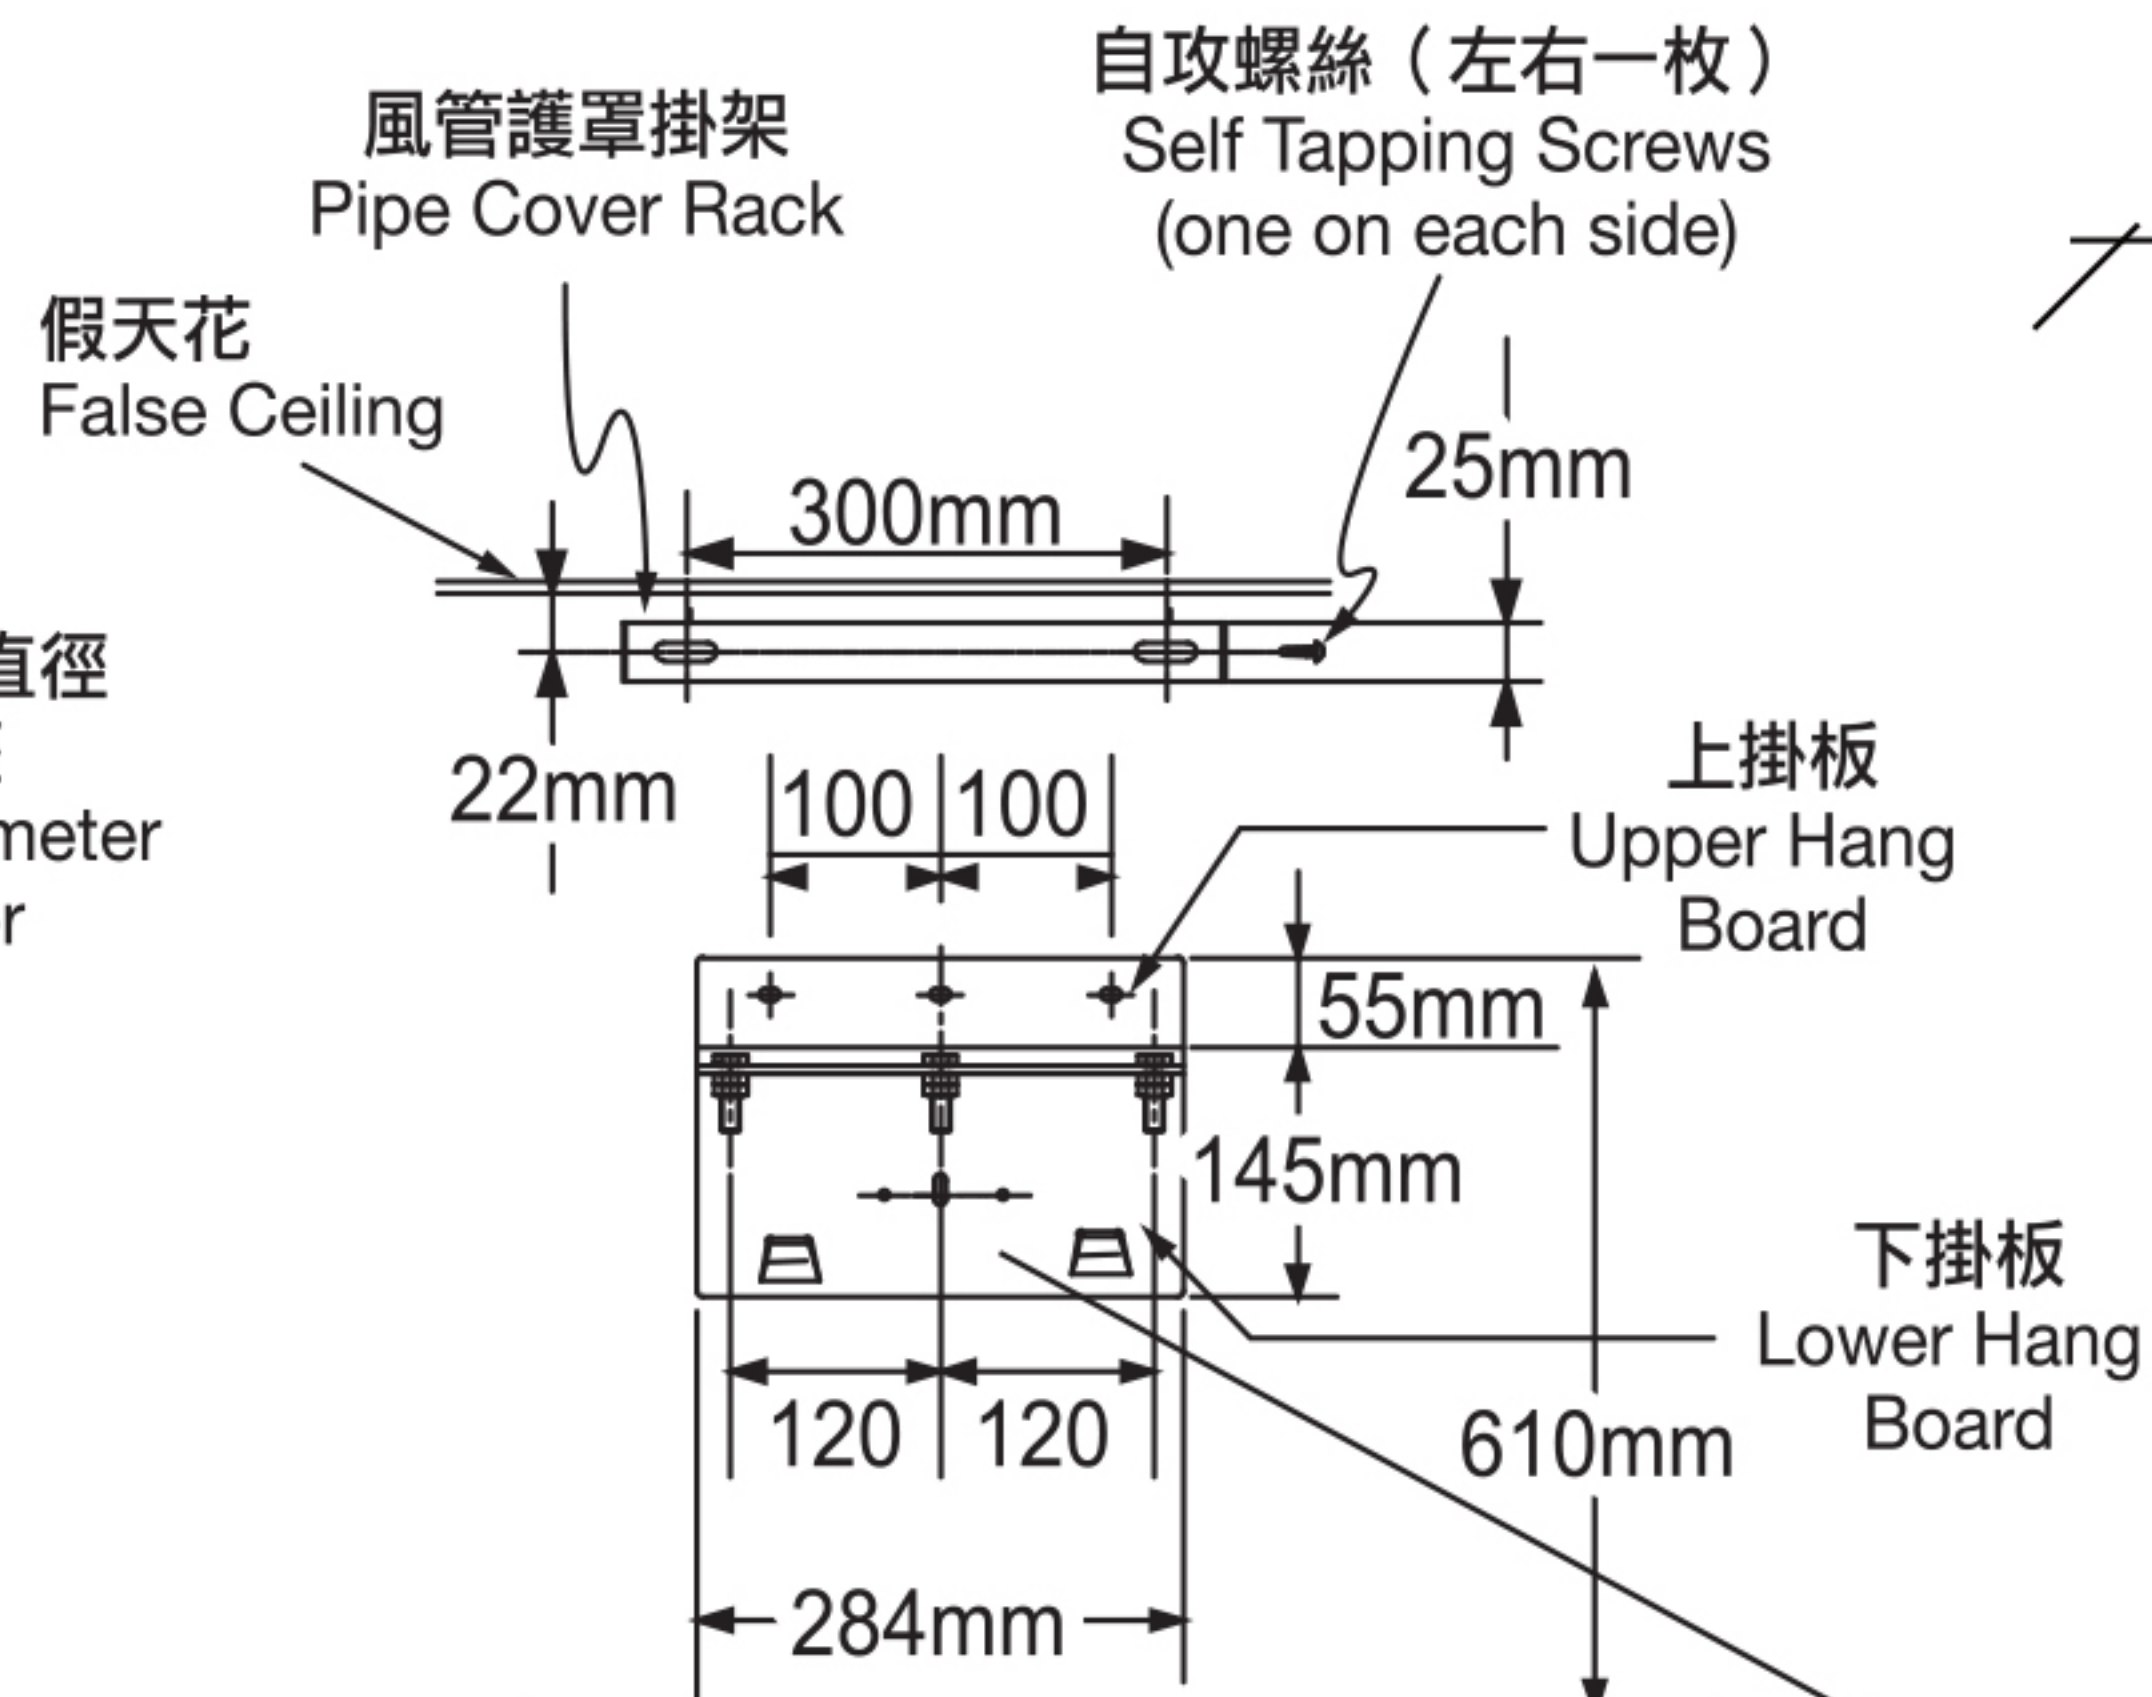

掛牆螺絲孔位置
Screw Position on Wall

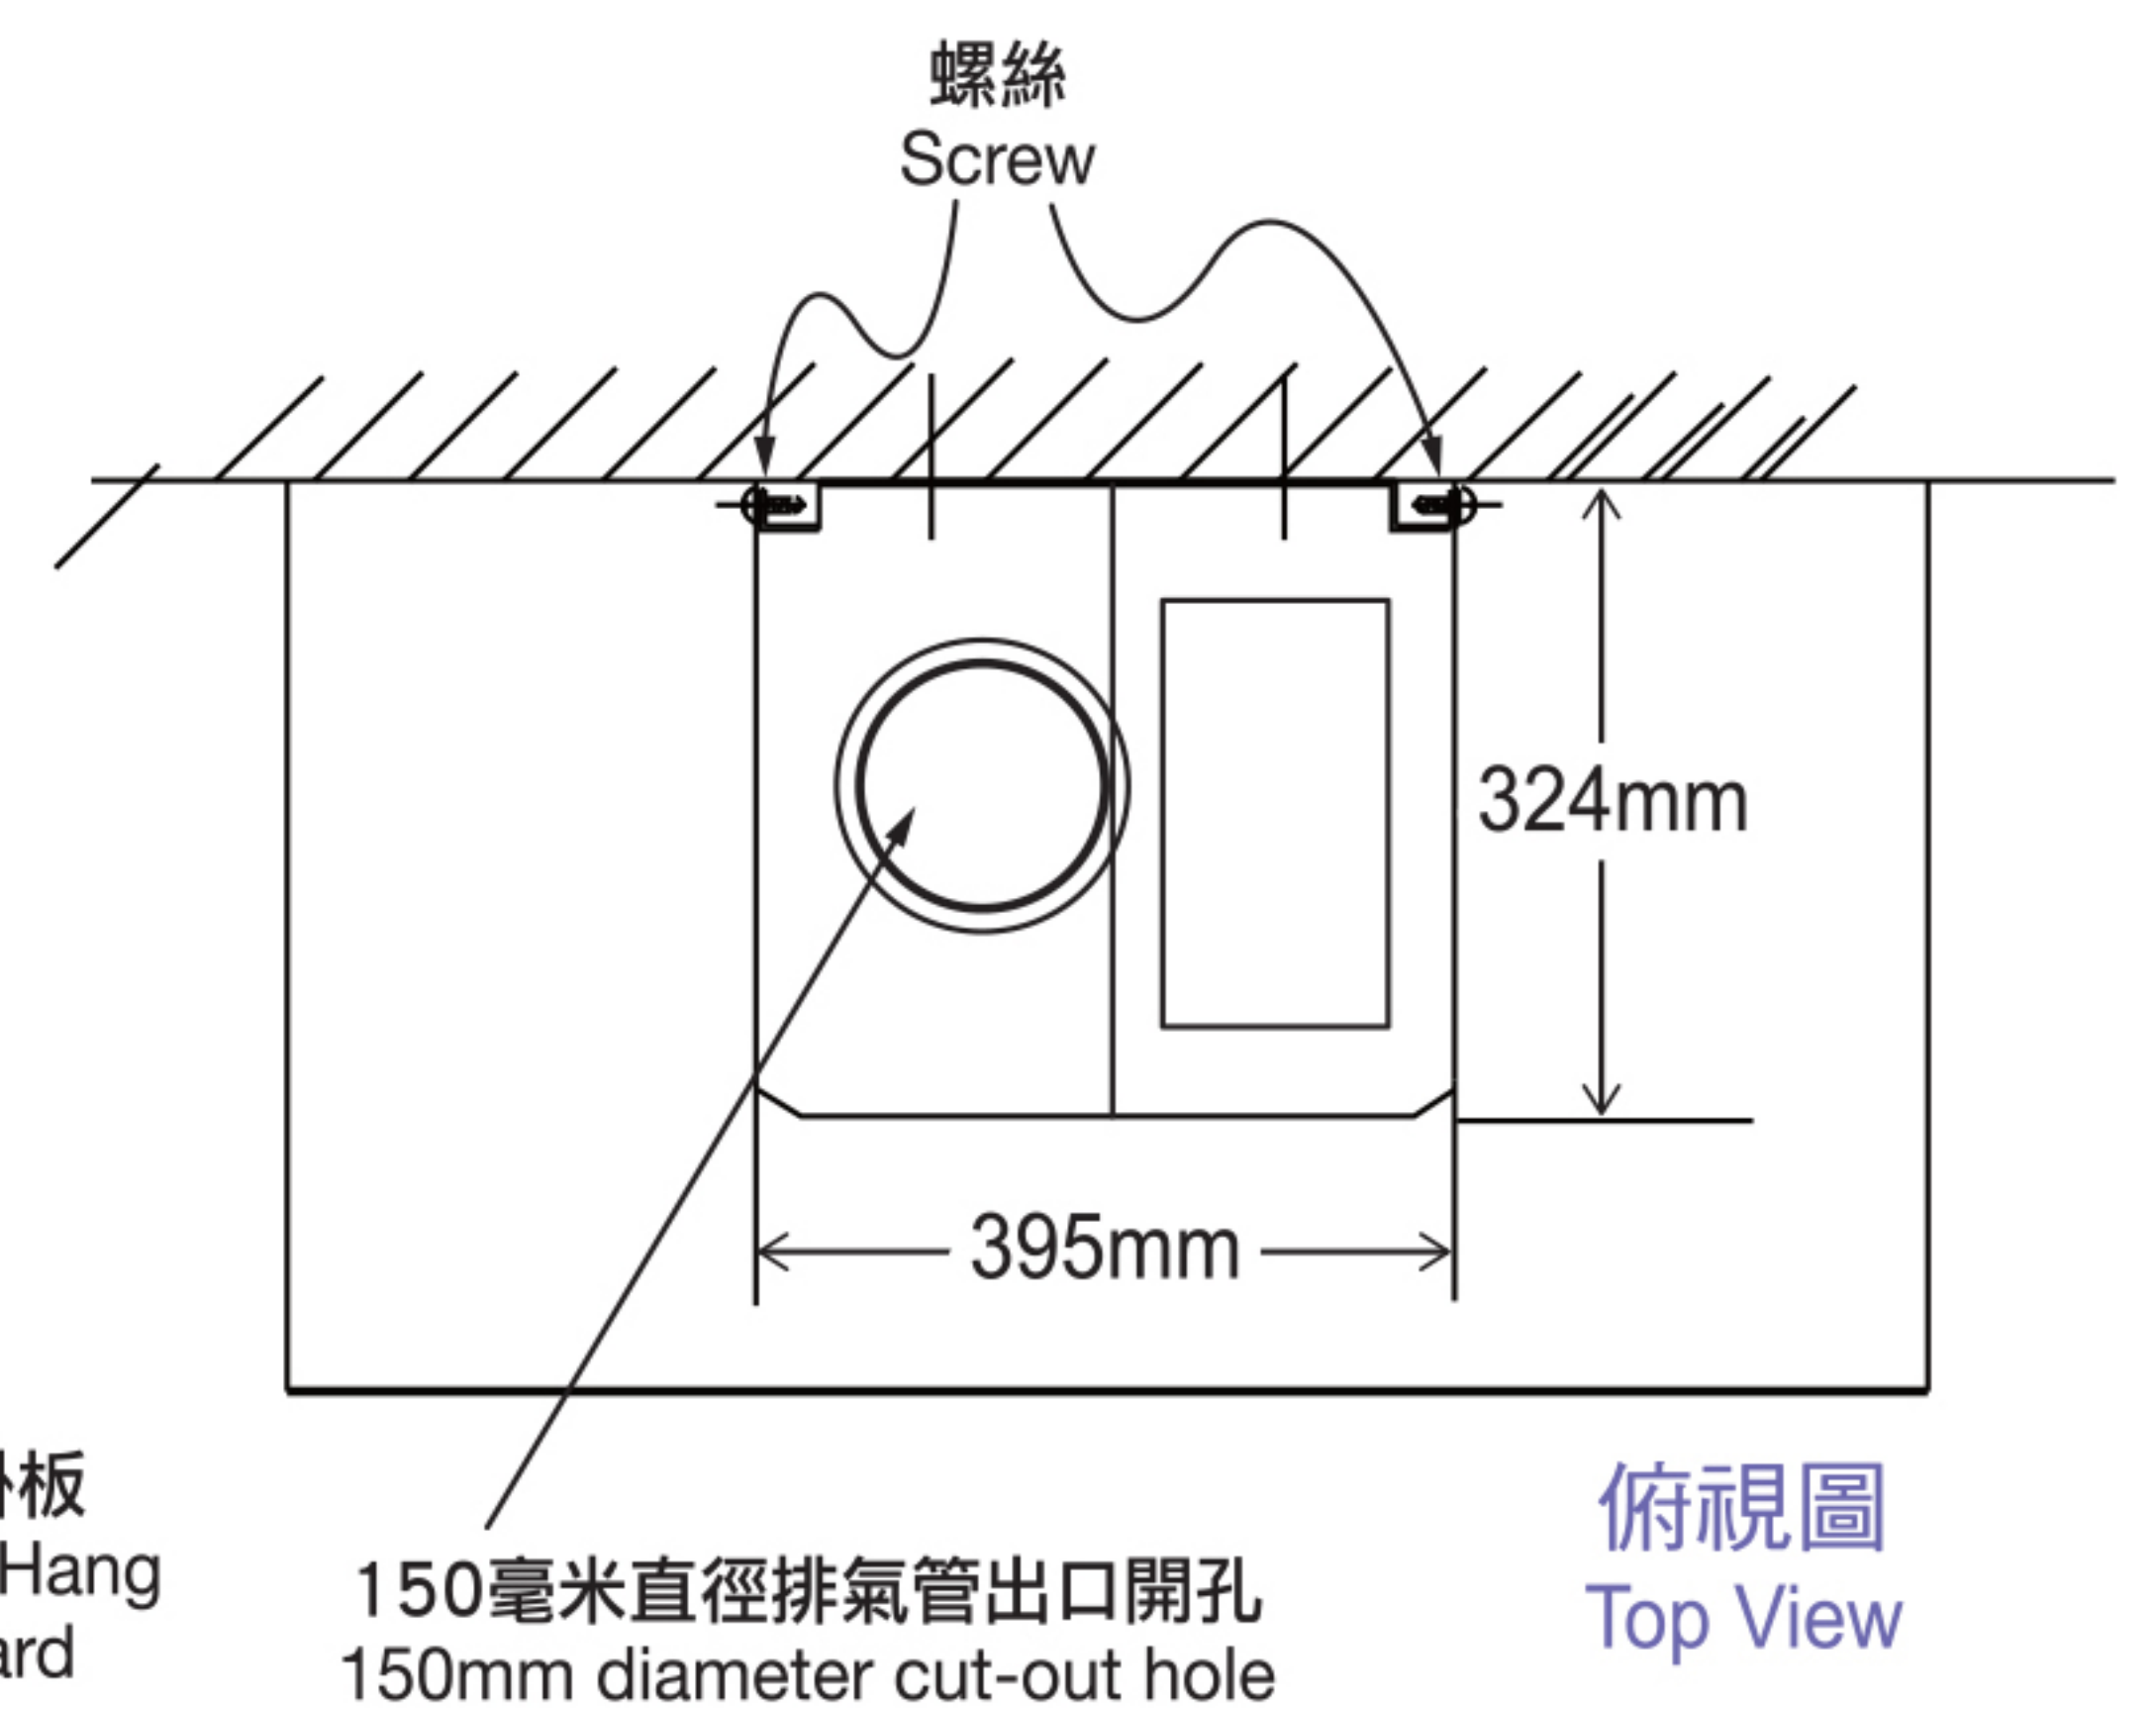

俯視圖
Top View

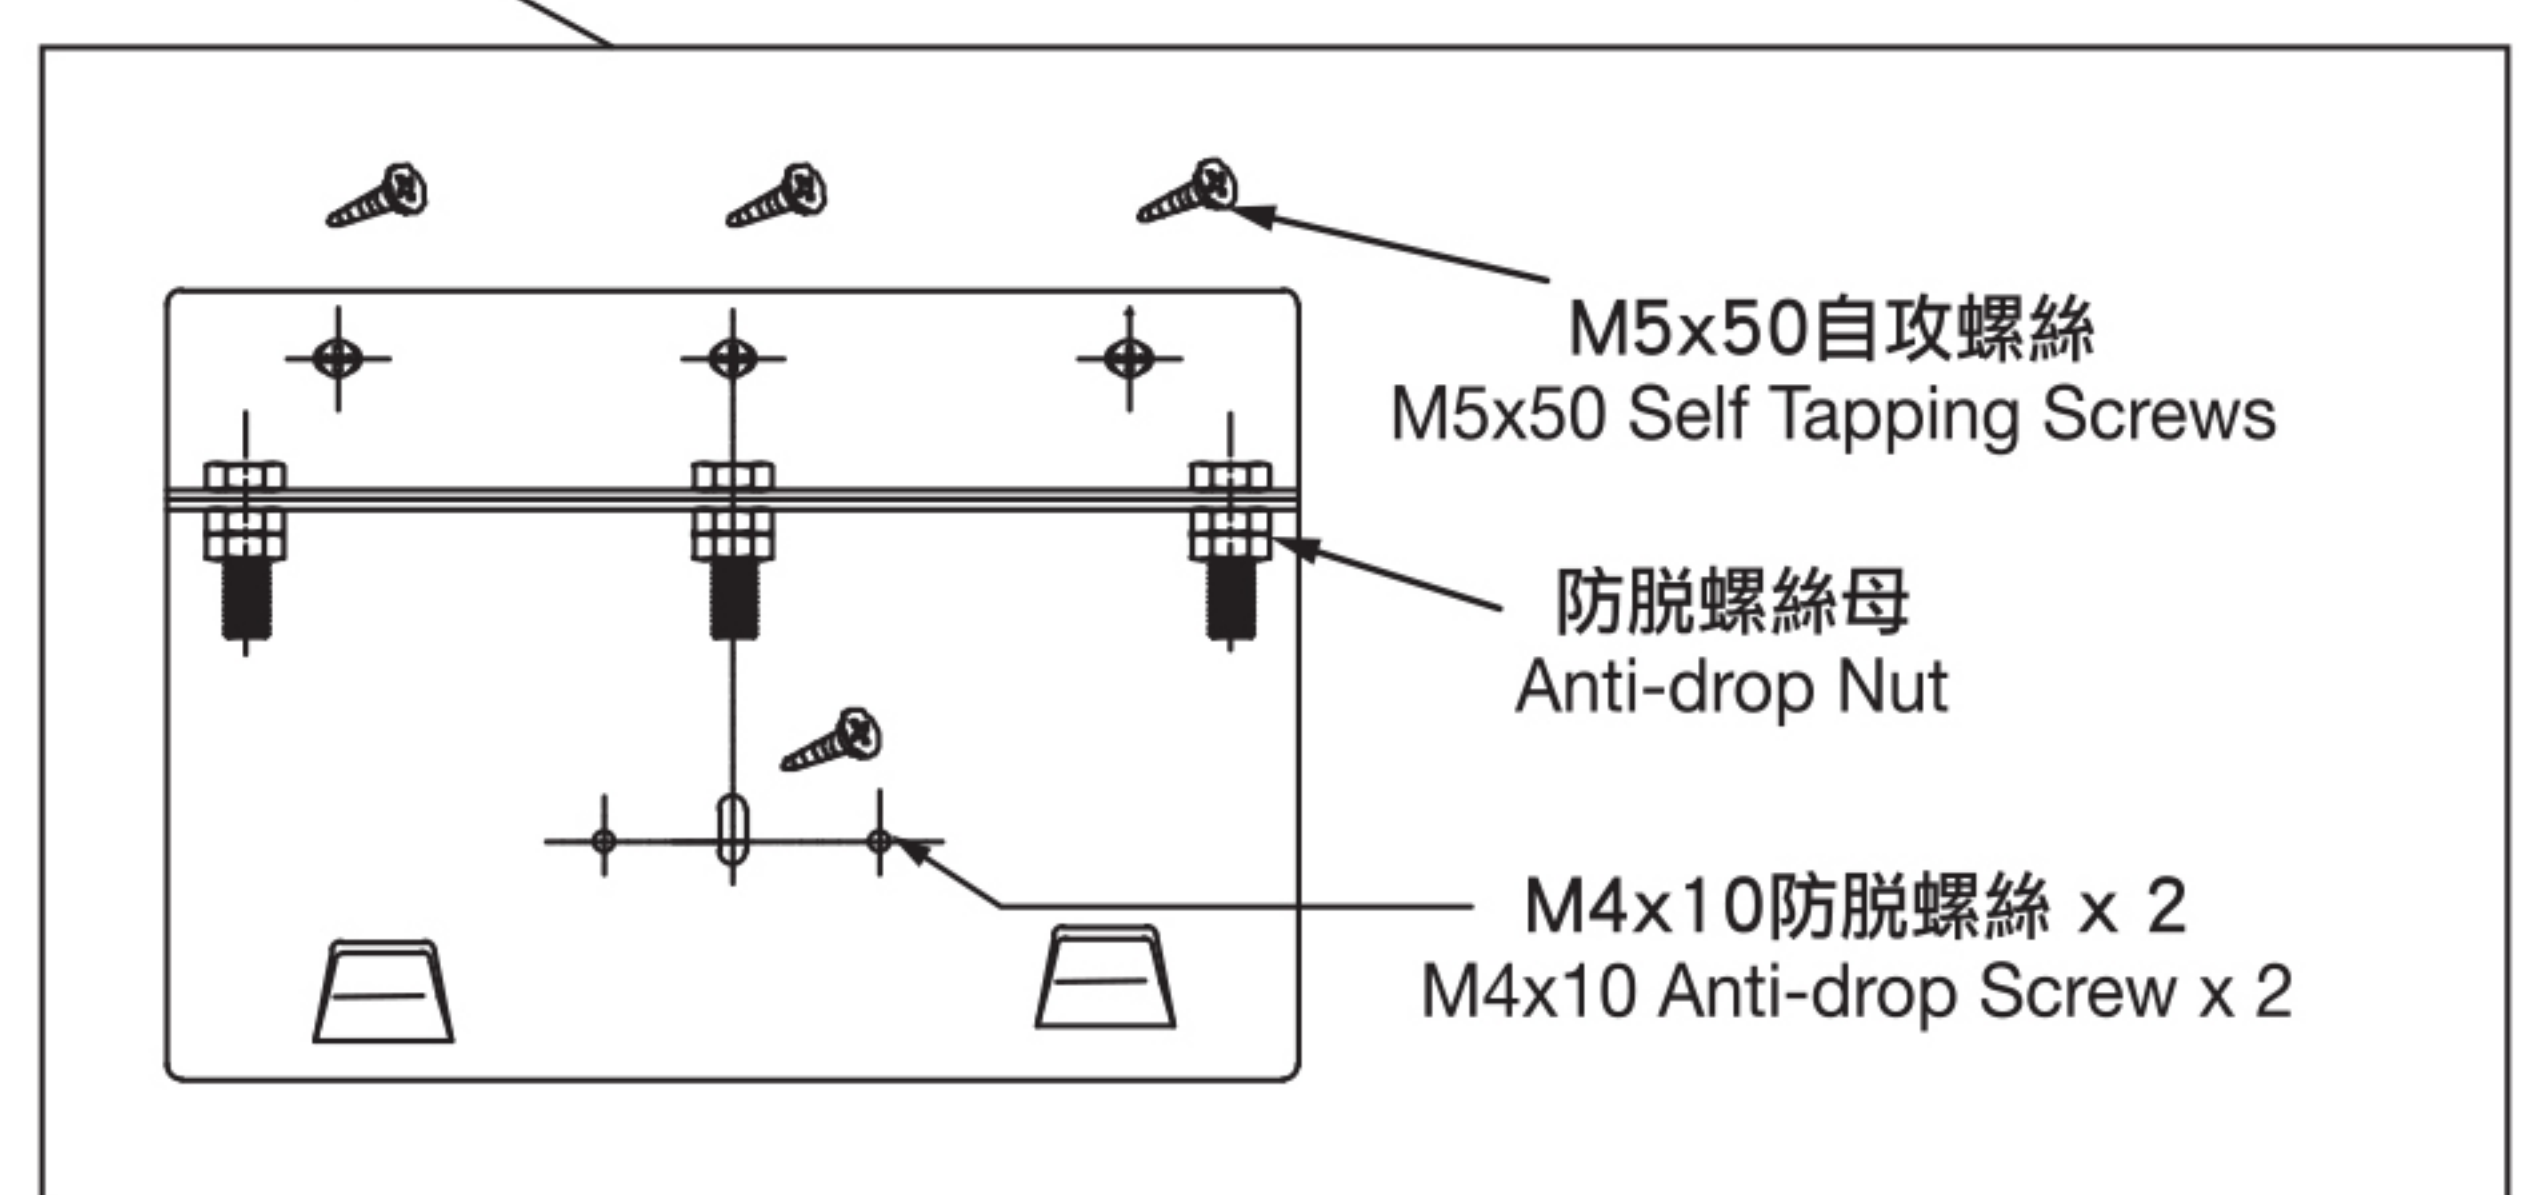

mm = 毫米

